

PORTABLE TRIPOD WORKLIGHT

- The tripod can be rotated from multiple angles, which is convenient for adjusting the product and can be in multi-angle lighting.
- There are metal pegs on the bottom of the legs, which can be used for photography, tent, etc.
- High-end constant current circuit design, constant brightness and good user experience.



Item No.	6926		
Light source	SMD		
Lumen	500lm	1500lm	5000lm
CRI	80		
Color temperature	Cool - Warm		
Battery	7.3V 4000mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - Mid - High - OFF		
Operating time	5h(Low) - 2.5h(Mid) - 1h(High)		
Charging time	4h		
Charging Port	Quick Coupling		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	1920x160x122 (Expand Status) 890x160x122(Storage Status)		
Weight(g)	4500		




Water Proof IPX4



Heat Sink



Matel, Removable

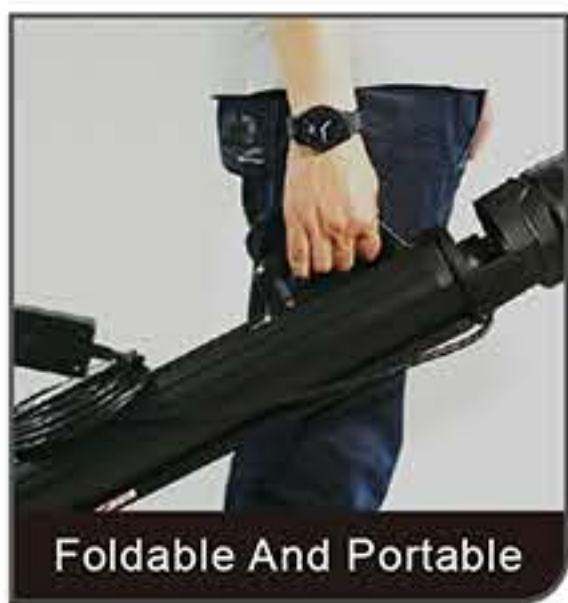

Foldable And Portable

Item No.	6956		
Light source	SMD		
Lumen	1500lm	5000lm	10000lm
CRI	80		
Color temperature	Cool - Warm		
Battery	14.6V 4000mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - Mid - High - OFF		
Operating time	5h(Low) - 2.5h(Mid) - 1h(High)		
Charging time	4h		
Charging Port	Quick Coupling		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	2200x150x150 (Expand Status) 647x150x150(Storage Status)		
Weight(g)	5490		



Foldable And Portable




Matel, Removable

Item No.	6958		
Light source	SMD		
Lumen	1800lm	5000lm	10000lm
CRI	80		
Color temperature	Cool - Warm		
Battery	14.6V 4000mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - Mid - High - OFF		
Operating time	8h(Low) - 3h(Mid) - 1.5h(High)		
Charging time	3h		
Charging Port	Quick Coupling		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	148x215x2000 (Expand Status) 148x215x850(Storage Status)		
Weight(g)	5555		



PORTABLE TRIPOD WORKLIGHT

- The product features three wings offering no dead angle lighting.
- After opening the bracket, it can be raised to a height of 1.7m for lighting.
- After removing the bracket, the bottom of the head carries a hook and magnet, which can be hung or fixed to the metal surface.

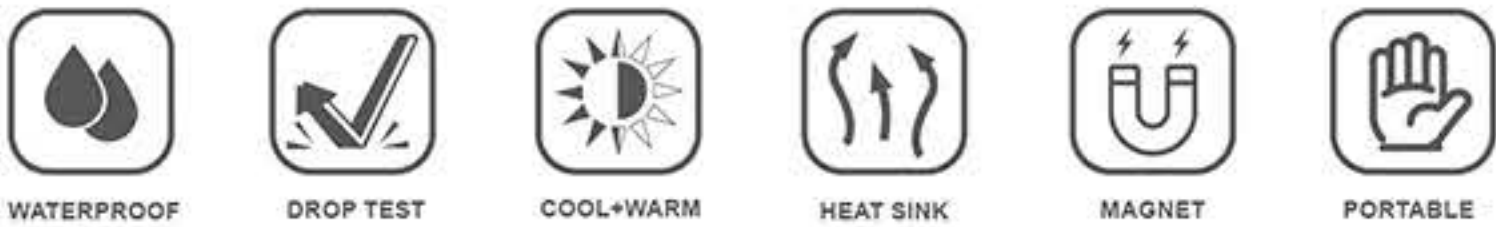


Item No.	6957-1 / 6957-3		
Light source	SMD		
Lumen (6957-1)	1500lm	3000lm	7000lm
Lumen (6957-3)	1200lm	2500lm	4500lm
CRI	80		
Color temperature	(6957-1) 6000-7500K	(6957-3) Cool - Warm	
Battery	7.3V 4000mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - Mid - High - OFF		
Operating time	(ZF6957-1) 7h(Low) - 3.5h(Mid) - 1.5h(High)		
Operating time	(ZF6957-3) 9h(Low) - 4.5h(Mid) - 2h(High)		
Charging time	6h		
Charging Port	USB-C		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	800x100x95 (Including tripod) 210x100x95 (Lamp cap), Highest 1700		
Weight(g)	1955		



PORTABLE TRIPOD WORKLIGHT

- The product features three wings offering no dead angle lighting.
- After opening the bracket, it can be raised to a height of 1.4m for illumination.
- After removing the bracket, the hook and magnet at the bottom of the head can help to be hung or placed to the metal surface.

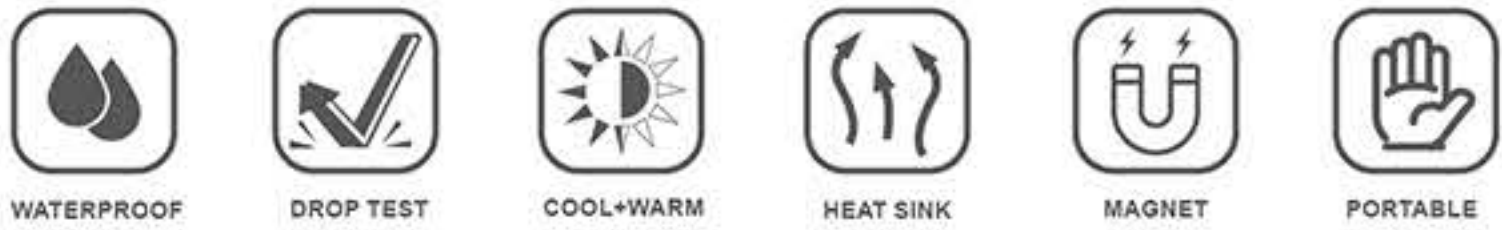

Item No.	6931-G		
Light source	SMD		
Lumen	700lm	1200lm	2000lm
CRI	80		
Color temperature	Cool - Warm		
Battery	3.7V 4000mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - Mid - High - OFF		
Operating time	8.5h(Low) - 3.5h(Mid) - 2h(High)		
Charging time	5h		
Charging Port	USB-C		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	665x80x80 (Including tripod) 210x80x80 (Lamp cap), Highest 1400		
Weight(g)	1759		



PORTABLE TRIPOD WORKLIGHT

- It can be used as a flashlight with single-sided SMD lighting.
- After unfolding the bracket, it can be raised to a height of 70cm for illumination.
- After removing the bracket, the bottom carries a magnet which can help to be fixed to the metal surface.



Item No.	6954		
Light source	SMD + Seoul M4		
Lumen (Flash Light)	100lm	150lm	300lm
Lumen (SMD)	120lm	250lm	500lm
CRI	80		
Color temperature	6000 - 7000K(SMD)		
Battery	3.7V 2000mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - Mid - High - OFF(Seoul M4 / SMD)		
Operating time	Flash Light 9h(Low) - 2h(Mid) - 1.5h(High)		
	SMD 9h(Low) - 5h(Mid) - 2.5h(High)		
Charging time	4h		
Charging Port	USB-C		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	240x36x36 (Including tripod) 102x36x36 (Lamp), Highest 700		
Weight(g)	240		

Item No.	6955		
Light source	SMD + COB		
Lumen (SMD)	120lm	400lm	500lm
CRI	70		
Color temperature	5500 - 7500K		
Battery	3.7V 3000mAh		
Charging indicator	Red - Green		
Switch function	Low - High - COB - OFF		
Operating time	16h(Low) - 4h(High) - 7.5h(COB)		
Charging time	3.5h		
Charging Port	USB-C		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	500x500x1155 (Expand Status) 65x65x310(Storage Status)		
Weight(g)	526		



SOLAR PANELS WORKLIGHT

Item No.	6938		
Light source	SMD		
Lumen (Flash Light)	300lm	120lm	
Lumen (SMD)	1200lm	500lm	
CRI	80		
Color temperature	6000 - 7000K		
Battery	3.7V 2600mAh		
Charging indicator	Red - Green		
Switch function	High - Low (Flash Light) High - Low - Strobe (SMD)		
Operating time	Flash Light 6h(High) - 20h(Low)		
	SMD 2h(High) - 4h(Low)		
Charging time	5h		
Charging Port	USB-C		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	705x66x72 (Including tripod) 160x66x72 (Lamp), Highest 2100		
Weight(g)	1295		



UNDERHOOD LIGHT

Item No.	6856	
Light source	SMD	
Lumen	1200lm	350lm
CRI	-	
Color temperature	-	
Battery	7.4V 750mAh + 7.4V 5200mAh	
Charging indicator	4 Power Indicators	
Switch function	High - Low - OFF	
Operating time	3h(High) - 8h(Low) / 2.5h(High) - 8h(Low)	
Charging time	5h	
Charging Port	DC	
IP/ IK rating	IPX4 / IK07	
Dimension(mm)	77x135x1300(2060)	
Weight(g)	1720	



UNDERHOOD LIGHT

Item No.	6856-A	
Light source	COB	
Lumen	1000lm	350lm
CRI	70	
Color temperature	6000-7500K	
Battery	7.4V 3200mAh	
Charging indicator	4 Power Indicators	
Switch function	High - OFF - Low - OFF	
Operating time	1.5h(High) - 4.5h(Low)	
Charging time	2h	
Charging Port	DC	
IP/ IK rating	IPX4 / IK07	
Dimension(mm)	130x80x1300(19000)	
Weight(g)	1600	

UNDERHOOD LIGHT



Bright Mode




Comfortable Mode



Soft Mode

Item No.	6610	
Light source	SMD	
Lumen	400lm	1200lm
CRI	80	
Color temperature	5500 - 6500K	
Battery	7.4V 5200mAh	
Charging indicator	4 Power Indicators	
Switch function	Low - High	
Operating time	10h(Low) - 3h(High)	
Charging time	4.5h	
Charging Port	DC	
IP/ IK rating	IPX0 / IK07	
Dimension(mm)	110x165x1215(2200)	
Weight(g)	1580	

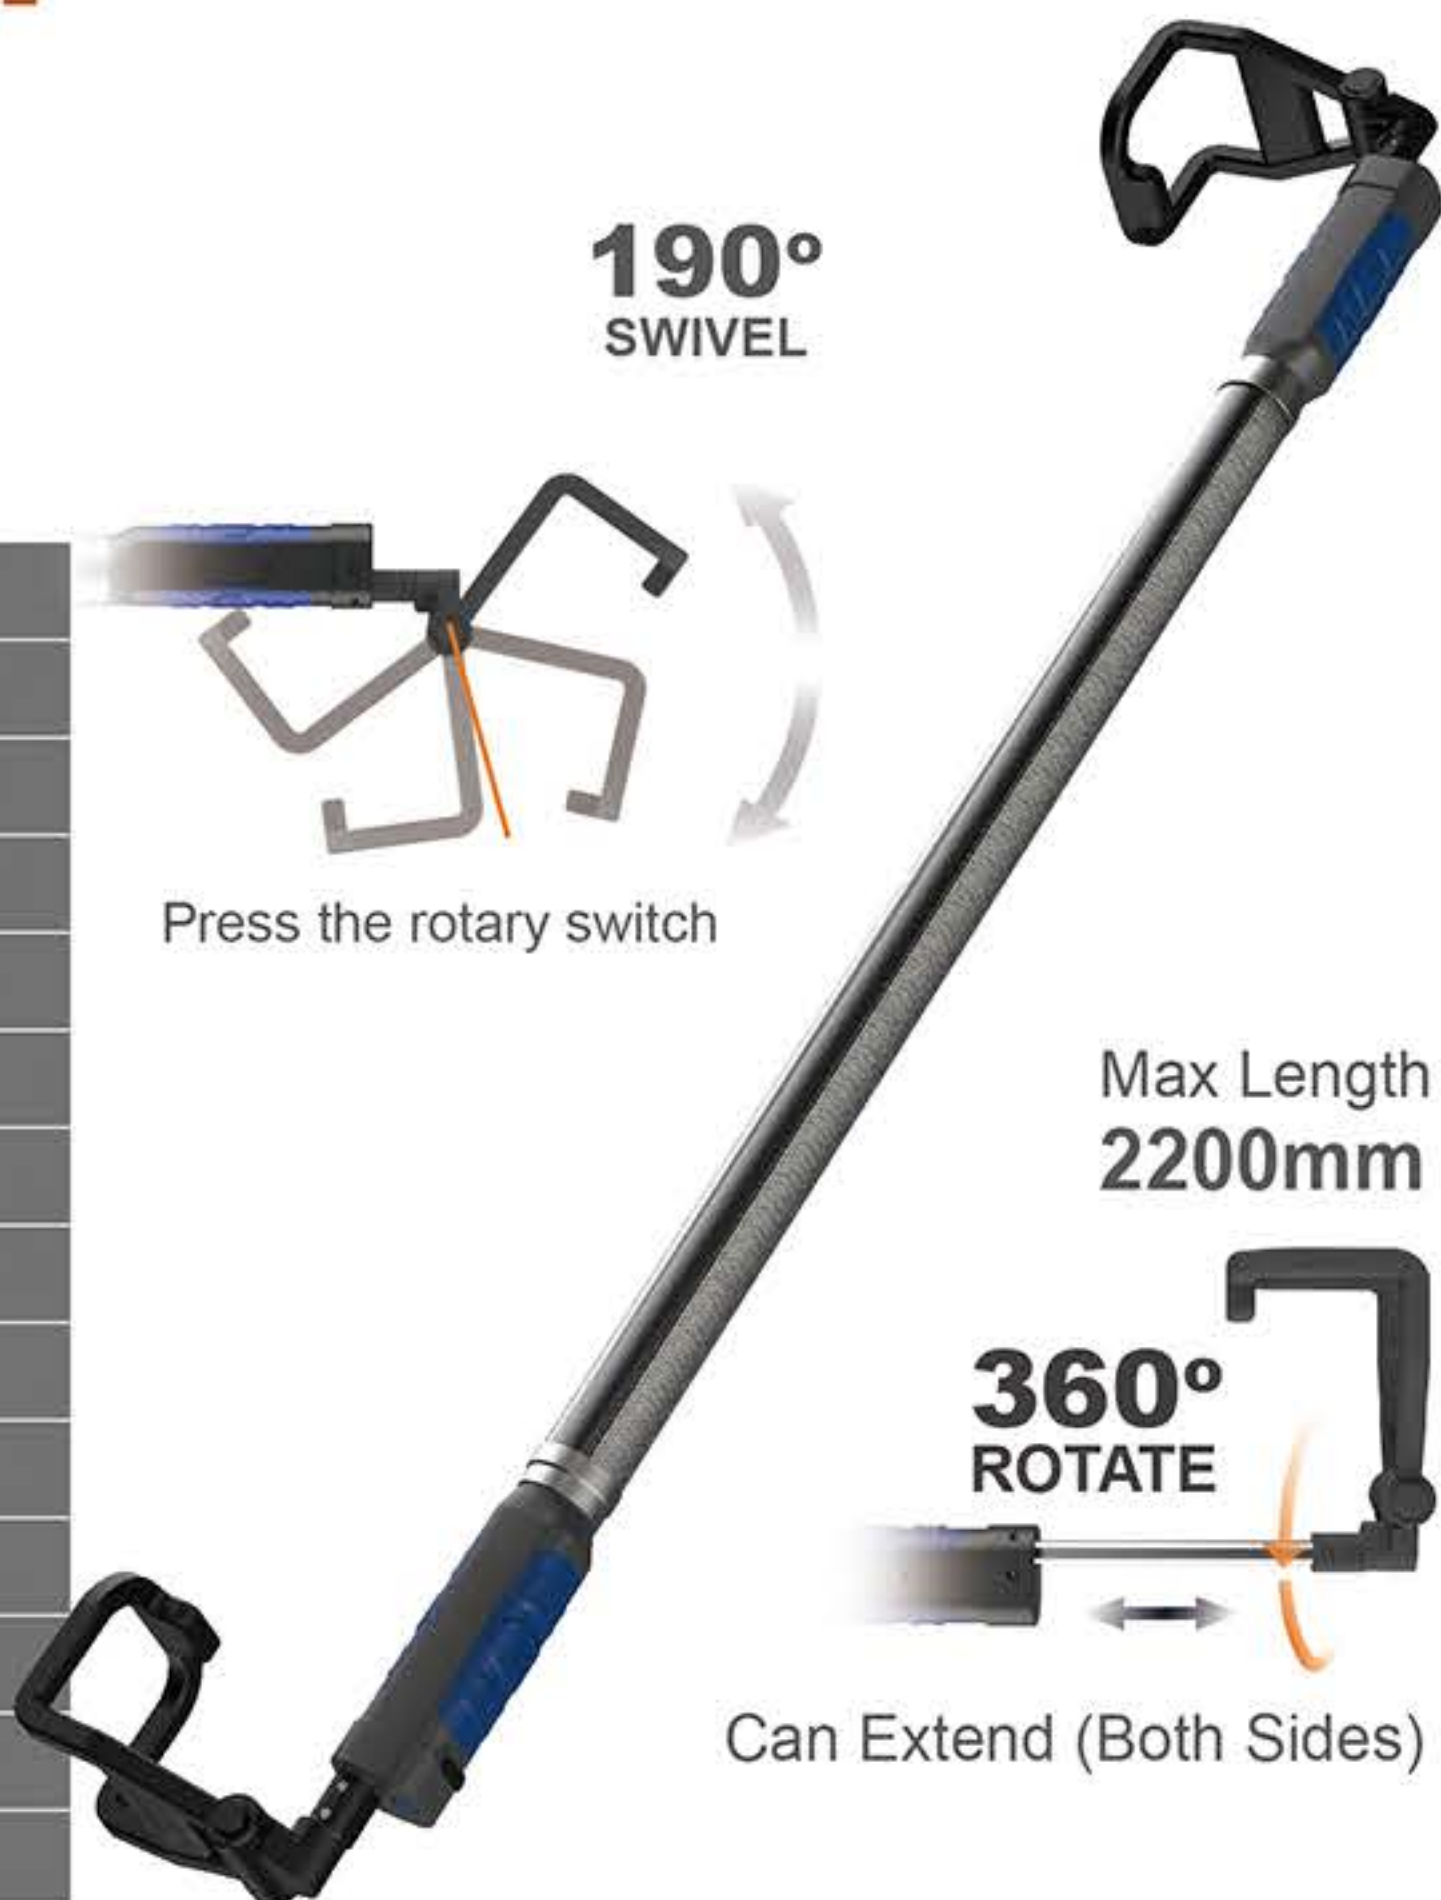


UNDERHOOD LIGHT

Item No.	6678	
Light source	SMD	
Lumen	400lm	1000lm
CRI	80	
Color temperature	5500 - 6500K	
Battery	3.65v 4000mAh	
Charging indicator	4 Power Indicators	
Switch function	Low - High	
Operating time	6h(Low) - 2h(High)	
Charging time	4.5h	
Charging Port	USB-C	
IP/ IK rating	IPX0 / IK07	
Dimension(mm)	130x77x1214(1870)	
Weight(g)	1080	



LIGHT & SPEAKER

- Provide high definition stereo sound with impressive volume.
- Equipped with advanced technology and compatible with all Bluetooth devices.

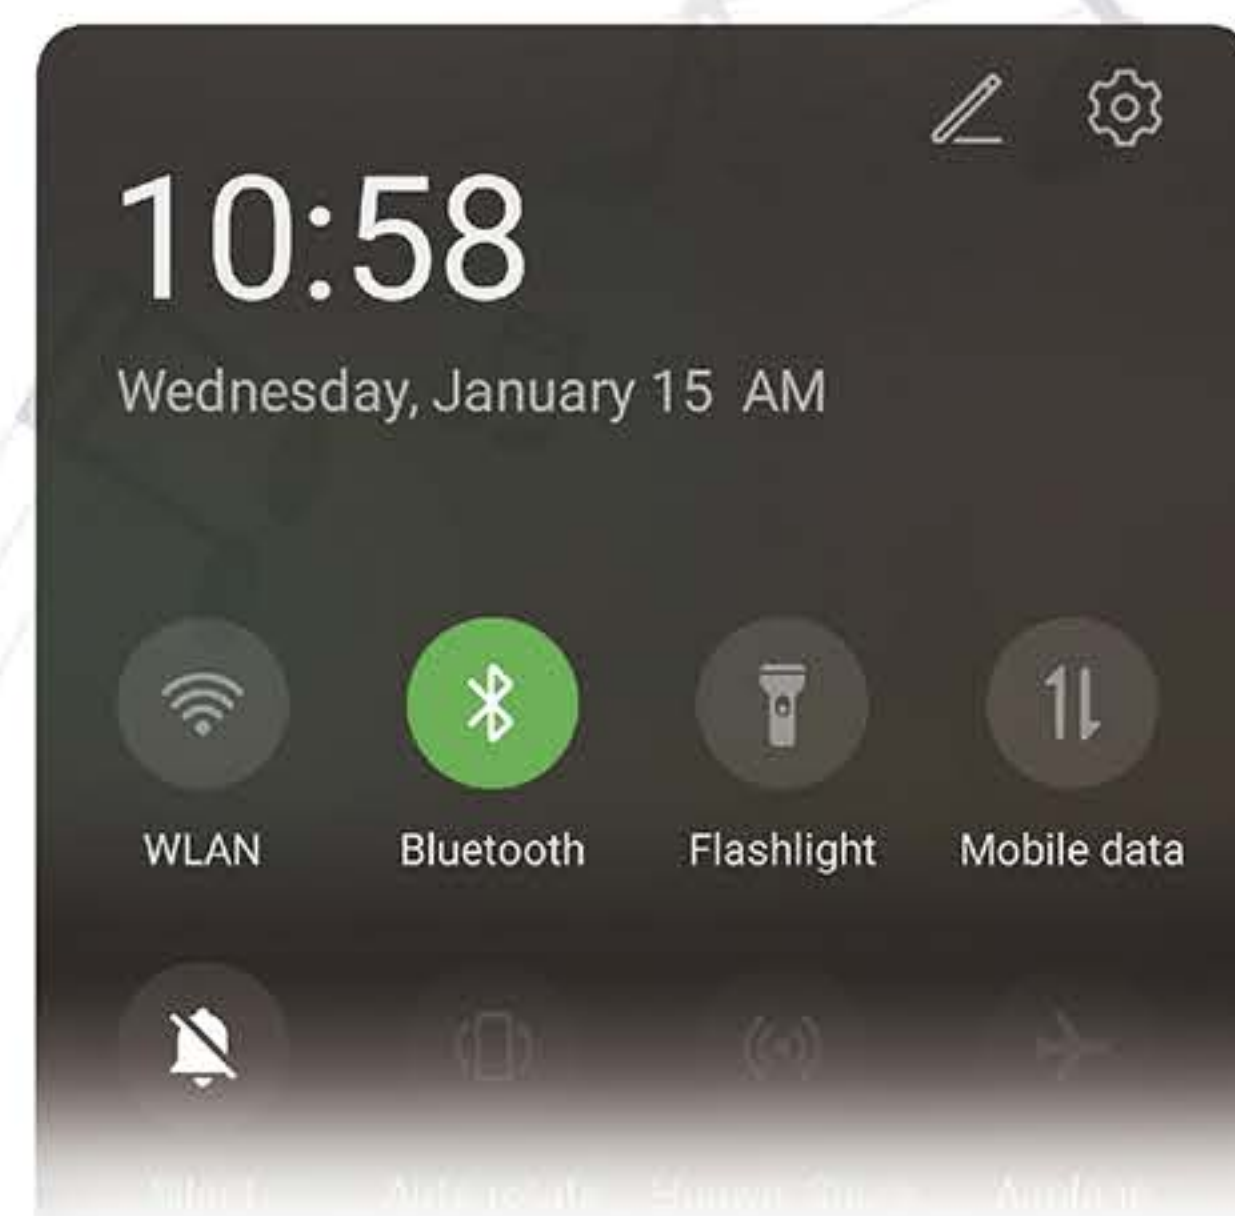

Item No.	6925					6915				
Light source	COB					COB				
Lumen	1100lm	880lm	650lm	450lm	270lm	2000lm	1600lm	1200lm	800lm	400lm
CRI	80					80				
Color temperature	6000 - 6500K					6000 - 6500K				
Battery	7.4V 2000mAh					7.3V 4000mAh				
Charging indicator	4 Power Indicators					4 Power Indicators				
Switch function	1000lm	800lm	600lm	400lm	200lm	2000lm	1600lm	1200lm	800lm	400lm
Operating time	2h	3h	3.7h	6.5h	12h	1.5h	2h	3h	4.5h	10h
Charging time	4h					3.5h				
Charging Port	Mirco USB					DC				
IP/ IK rating	IPX4 / IK07					IPX4 / IK07				
Dimension(mm)	187x122x50.5					212.4x138.5x65				
Weight(g)	690					1014				



Item No.	6920	6603	6651
Light source	SMD+COB	SMD+COB	SMD+COB
Lumen	250lm(Low) - 500lm(High) - 90lm(Top)	150lm(Low) - 500lm(High) - 160lm(Top)	230lm(Low) - 500lm(High) - 130lm(Top)
CRI	80	80	80
Color temperature	5000 - 7000K	5000 - 7000K	5000 - 7500K
Battery	3.7V 2000mAh	3.7V 3000mAh	3.7V 2000mAh
Charging indicator	Red -Green	4 Power Indicators	Red -Green
Switch function	Low - High - Top - OFF	Low - High - Top - OFF	Low - High - Top - OFF
Operating time	4h(Low) - 2.5h(High) - 5h(Top)	14h(Low) - 3h(High) - 6h(Top)	5h(Low) - 2.5h(High) - 4h(Top)
Charging time	4h	4.5h	4h
Charging Port	Mirco USB	Mirco USB	Mirco USB
IP/ IK rating	IPX4 / IK07	IPX4 / IK07	IPX3 / IK07
Dimension(mm)	162x55x21	164x66x27	162x55x21
Weight(g)	190	320	204

Item No.	6917
Light source	SMD (Warm+White+Red)
Lumen	300lm(Warm) - 300lm(White) - 20lm(Red)
CRI	80 (Warm + White)
Color temperature	White(6000-6500K) - Warm(2700-3200K) - Red(800-1300K)
Battery	3.7V 4400mAh
Charging indicator	4 Power Indicators
Switch function	Warm - White - Red - Red Strobe - OFF
Operating time	3h(Warm) - 3h(White) - 8h(Red)
Charging time	4.5h
Charging Port	Mirco USB
IP/ IK rating	IPX4 / IK07
Dimension(mm)	89.5x85x83.5
Weight(g)	329



COB WORKLIGHT

- The stand can be 180 degrees rotated, which is convenient for multi-angle lighting.
- There is a positioning hole inside the stand, which can be used for photography, tents, etc.



WATERPROOF



DROP TEST



POWER BANK



Item No.	6916-B						
Light source	COB						
Lumen	3500lm	3000lm	2500lm	2000lm	1500lm	1000lm	500lm
CRI	80						
Color temperature	5700 - 6200K						
Battery	14.6V 4000mAh						
Charging indicator	5 Power Indicators						
Switch function	20% - 40% - 60% - 80% - 100%						
Operating time	2h	2.3h	2.7h	3.4h	4.5h	6.5h	12h
Charging time	3.5h						
Charging Port	DC						
IP/ IK rating	IPX4 / IK07						
Dimension(mm)	211x211x64						
Weight(g)	1457.5						



Item No.	6913				
Light source	COB				
Lumen	1100lm	900lm	680lm	450lm	220lm
CRI	80				
Color temperature	6000 - 6500K				
Battery	3.7V 6600mAh				
Charging indicator	4 Power Indicators				
Switch function	100% - 80% - 60% - 40% - 20%				
Operating time	3h	3.5h	4h	5h	10h
Charging time	5h				
Charging Port	DC				
IP/ IK rating	IPX4 / IK07				
Dimension(mm)	170x170x47.5				
Weight(g)	732				



Item No.	6869	
Light source	COB	
Lumen	350lm	1100lm
CRI	80	
Color temperature	6000 - 6500K	
Battery	3.7V 4400mAh	
Charging indicator	4 Power Indicators	
Switch function	Low - High - OFF	
Operating time	6h	3h
Charging time	6h	
Charging Port	DC	
IP/ IK rating	IPX4 / IK07	
Dimension(mm)	200x185x45	
Weight(g)	740	

Item No.	6908-A	
Light source	COB	
Lumen	350lm	1100lm
CRI	80	
Color temperature	6000 - 6500K	
Battery	3.7V 4400mAh	
Charging indicator	4 Power Indicators	
Switch function	Low - High - OFF	
Operating time	6h	3h
Charging time	6h	
Charging Port	DC	
IP/ IK rating	IPX4 / IK07	
Dimension(mm)	189.5x164.5x45.5	
Weight(g)	720	



MULTI-FUNCTION WORKLIGHT

- There is a stand that can rotate 360 degrees, making it easy to adjust the product for multi-angle lighting.
- There is a hook on the stand, which can be used for photography, tents, etc.



Item No.	6936		
Light source	COB		
Lumen	600lm	1200lm	2000lm
CRI	80		
Color temperature	6000 - 7000K		
Battery	3.7V 4000mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - Mid - High - Red - OFF		
Operating time	(Low) 9h - (Mid) 5h - (High) 2h		
Charging time	5h		
Charging Port	USB-C		
IP/ IK rating	IPX6 / IK07		
Dimension(mm)	180x155x59		
Weight(g)	710		



It can be folded into various needs for various spaces.


Item No.	6930			
Light source	COB(White+ Warm + Red)			
Lumen	300lm	600lm	900lm	1500lm
CRI	80			
Color temperature	White - Warm			
Battery	3.65V 8000mAh			
Charging indicator	4 Power Indicators			
Switch function	20% - 40% - 60% - 100%			
Operating time	12h(20%) - 8h(40%) - 5h(60%) - 3h(100%)			
Charging time	6h			
Charging Port	USB-C			
IP/ IK rating	IPX4 / IK07			
Dimension(mm)	128x99.5x46			
Weight(g)	482.5			



Item No.	6927		
Light source	COB + SMD		
Lumen	120lm(SMD-Low)	350lm(SMD-High)	550lm(COB)
CRI	70		
Color temperature	5500 - 7500K		
Battery	3.7V 2000mAh		
Charging indicator	Red - Green		
Switch function	Low - High - COB - OFF		
Operating time	9.5h(SMD-Low) - 5h(SMD-High) - 4.5h(COB)		
Charging time	3.5h		
Charging Port	Micro USB		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	72x76x49.5		
Weight(g)	170		



Item No.	6928		
Light source	COB + SMD		
Lumen	150lm(SMD-Low)	500lm(SMD-High)	800lm(COB)
CRI	65		
Color temperature	6000 - 7000K		
Battery	3.7V 4000mAh		
Charging indicator	Red - Green		
Switch function	Low - High - COB - OFF		
Operating time	9h(SMD-Low) - 5h(SMD-High) - 3h(COB)		
Charging time	4h		
Charging Port	USB-C		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	93x89x60		
Weight(g)	305		

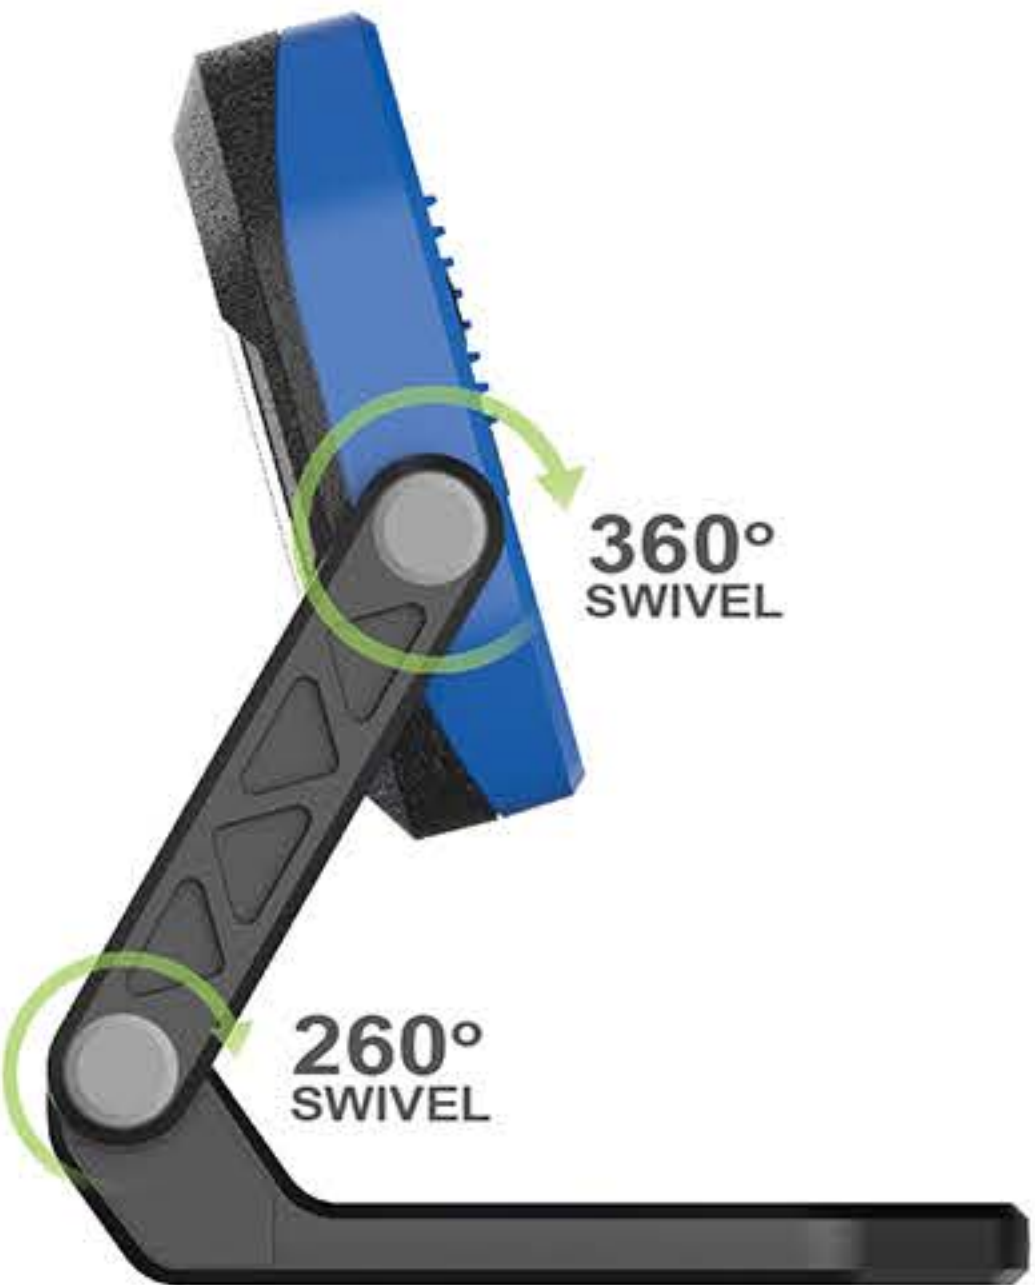

MULTI 3-in-1 WORKLIGHT

- FLASHLIGHT
- FOLDING WORKLIGHT
- FLEXIBLE WORKLIGHT

Item No.	7524
Battery	3.7V 2200mAh
Switch function	Low - High - OFF
Charging indicator	Red - Green
Charging time	4h
Charging Port	Micro USB
IP/ IK rating	IPX4 / IK07
Dimension(mm)	33.5x25x142
Weight(g)	178



- 1-TORCH BODY
- 2-TORCH LIGHT
- 3-FLEXIBLE LIGHT
- 4-WORKLIGHT



Item No.	7526-2
Light source	CREE XPG
Modes	Low - High - OFF
Lumen	140lm(Low) - 280lm(High)
Operating time	5h(Low) - 2.5h(High)
Dimension(mm)	35x35x70
Weight(g)	68



Item No.	7526-6
Light source	CREE XPG
Modes	Low - High - OFF
Lumen	100lm(Low) - 190lm(High)
Operating time	8h(Low) - 5.5h(High)
Dimension(mm)	8x20x415
Weight(g)	100



Item No.	7526-14
Light source	COB
Modes	Low - High - OFF
Lumen	180lm(Low) - 380lm(High)
Operating time	4h(Low) - 1.5h(High)
Dimension(mm)	35x35x229.5
Weight(g)	86





BASE CHARGING WORKLIGHT

- Adopting aluminum heat sink, with good heat dissipation effect, ensuring efficient and efficient operation of COB.
- Designed with multiple light sources and suitable for different lighting environments.
- Using a charging stand for charging, simply placing it in the charging stand for charging, saving time and effort.



Item No.	6692		
Light source	SMD + COB		
Lumen	200lm(Low)	600lm(High)	200lm(SMD)
CRI	70		
Color temperature	5500 - 7500K		
Battery	3.7V 4000mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - High - SMD - OFF		
Operating time	9h(Low) - 3h(High) - 9h(SMD)		
Charging time	4.5h		
Charging Port	USB-C		
IP/ IK rating	IPX6 / IK07		
Dimension(mm)	186x53.5x36		
Weight(g)	245		

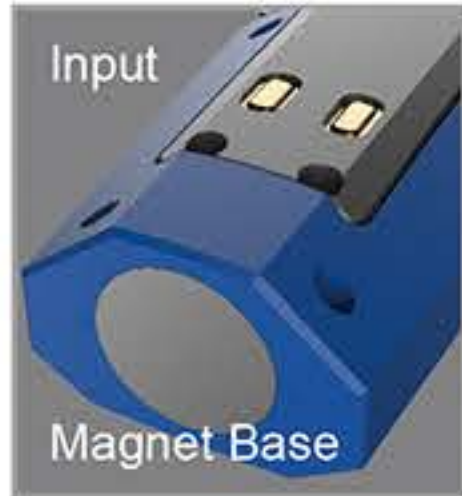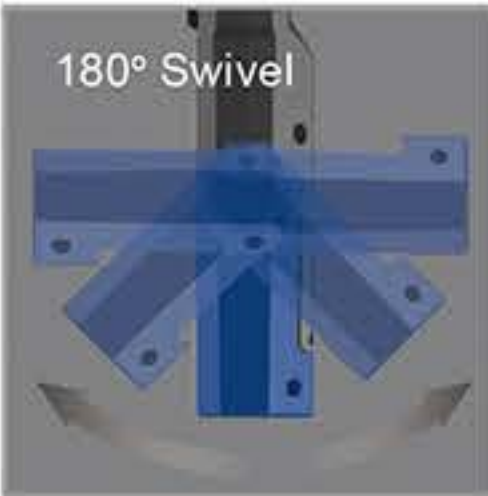

Item No.	6740
Light source	SMD + COB
Lumen	100lm - 300lm - 100lm(SMD)
CRI	70
Color temperature	5500 - 7500K
Battery	4.2V 5000F
Charging indicator	4Power Indicators
Switch function	Low - High - SMD - OFF
Operating time	8h(Low) - 4h(High) - 5h(SMD)
Charging time	1h(20W Adapter)
Charging Port	USB-C
IP/ IK rating	IPX6 / IK07
Dimension(mm)	185x50x32
Weight(g)	228



Item No.	6742
Light source	SMD + COB
Lumen	120lm - 400lm - 200lm(SMD)
CRI	70
Color temperature	5500 - 7500K
Battery	3.7V 2200mAh
Charging indicator	4Power Indicators
Switch function	Low - High - SMD - OFF
Operating time	9h(Low) - 3h(High) - 5h(SMD)
Charging time	2.5h
Charging Port	USB-C
IP/ IK rating	IPX6 / IK07
Dimension(mm)	165x54x30
Weight(g)	196.6




Item No.	6740-A
Light source	SMD + COB
Lumen	200lm - 600lm - 200lm(SMD)
CRI	70
Color temperature	5500 - 7500K
Battery	3.7V 4000mAh
Charging indicator	4Power Indicators
Switch function	Low - High - SMD - OFF
Operating time	12h(Low) - 3h(High) - 9h(SMD)
Charging time	3h
Charging Port	USB-C
IP/ IK rating	IPX6 / IK07
Dimension(mm)	185x50x32
Weight(g)	245



Item No.	6743
Light source	SMD + COB
Lumen	50lm - 200lm - 50lm(SMD)
CRI	70
Color temperature	5500 - 7500K
Battery	3.7V 750mAh
Charging indicator	4Power Indicators
Switch function	Low - High - SMD - OFF
Operating time	8h(Low) - 2h(High) - 4h(SMD)
Charging time	2.5h
Charging Port	USB-C
IP/ IK rating	IPX6 / IK07
Dimension(mm)	155.6x35.2x22.2
Weight(g)	94.6

HANDHELD WORKLIGHT

- There is a stand that can rotate in different angles, making it easy to adjust the lightings.
- Applied with hook & magnet for easy carrying and placement.
- The whole lamp is designed to use TPR material, which feels good on hand.
- USB waterproof cover uses innovative sliding design.

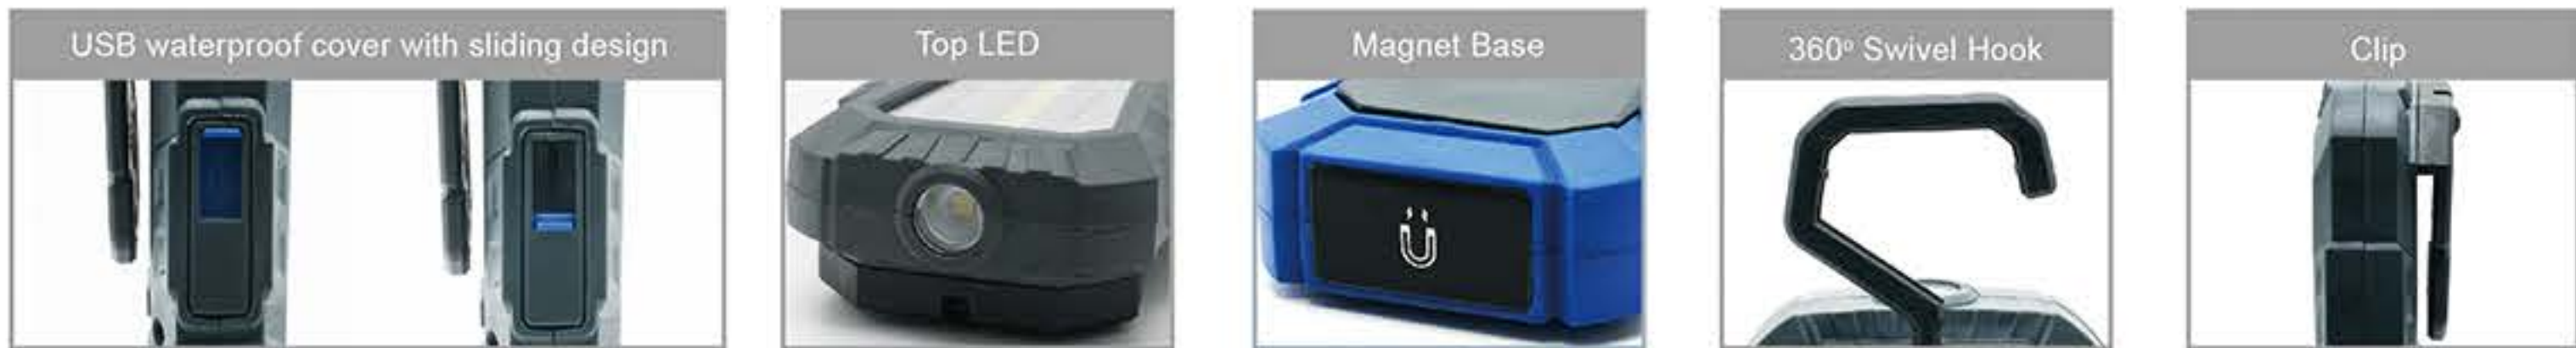

Item No.	6846	6847	6848
Light source	SMD+COB	SMD+COB	SMD+COB
Lumen	120lm(Low) - 420lm(High) - 45lm(Top)	70lm(Low) - 240lm(High) - 45lm(Top)	30lm(Low) - 110lm(High) - 45lm(Top)
CRI	70	70	70
Color temperature	6000 - 7000K	6000 - 7000K	6000 - 7000K
Battery	3.7V 4400mAh	3.7V 2200mAh	3.7V 1000mAh
Charging indicator	4 Power Indicators	4 Power Indicators	4 Power Indicators
Switch function	Low - High - Top - OFF	Low - High - Top - OFF	Low - High - Top - OFF
Operating time	10h(Low) - 3h(High) - 25h(Top)	10h(Low) - 3h(High) - 13h(Top)	8h(Low) - 2.5h(High) - 4.5h(Top)
Charging time	4.5h	3.5h	2h
Charging Port	Micro USB	Micro USB	Micro USB
IP/ IK rating	IPX4 / IK07	IPX4 / IK07	IPX4 / IK07
Dimension(mm)	60x32x190	52x32x163	48x30x116
Weight(g)	300	200	105

Item No.	6851		
Light source	SMD + COB		
Lumen	30lm(Low)	110lm(High)	60lm(SMD)
CRI	70		
Color temperature	6000 - 7000K		
Battery	3.7V 750mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - High - SMD - OFF		
Operating time	6.5h(Low) - 2h(High) - 3.5h(SMD)		
Charging time	2h		
Charging Port	Micro USB		
IP/ IK rating	IPX0 / IK07		
Dimension(mm)	152x30x21		
Weight(g)	70		



Item No.	6799		
Light source	SMD + COB		
Lumen	210lm(Low)	800lm(High)	55lm(SMD)
CRI	70		
Color temperature	6000 - 7000K		
Battery	3.6V 6000mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - High - SMD - OFF		
Operating time	12h(Low) - 3.5h(High) - 30h(SMD)		
Charging time	5h		
Charging Port	DC		
IP/ IK rating	IPX0 / IK07		
Dimension(mm)	307.5x66x39		
Weight(g)	534		

Item No.	6814		
Light source	SMD + COB		
Lumen	120lm(Low)	420lm(High)	45lm(SMD)
CRI	70		
Color temperature	6000 - 7000K		
Battery	3.7V 4400mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - High - SMD - OFF		
Operating time	10h(Low) - 3h(High) - 25h(SMD)		
Charging time	4.5h		
Charging Port	Micro USB		
IP/ IK rating	IPX0 / IK07		
Dimension(mm)	217x57x29		
Weight(g)	284		



HIGH LUMENS WORKLIGHT

- There is a stand that can rotate in various angles, making it easy to adjust the lightings.
- Applied with hook and magnet for easy carrying and placement.



Item No.	6640	
Light source	SMD + COB	
Lumen	1000lm(COB)	200lm(SMD)
CRI	70	
Color temperature	5000 - 6500K	
Battery	3.7V 2700mAh	
Charging indicator	Red - Green	
Switch function	SMD - COB - OFF	
Operating time	3h(COB) - 6h(SMD)	
Charging time	4.5h	
Charging Port	Micro USB	
IP/ IK rating	IPX0 / IK07	
Dimension(mm)	51x26x150	
Weight(g)	195	



Hook



Swivel Stand



Power Bank



Magnet Base

Item No.	6602		
Light source	SMD + COB		
Lumen	120lm(Low)	420lm(High)	55lm(SMD)
CRI	70		
Color temperature	5500 - 7500K		
Battery	3.7V 4400mAh		
Charging indicator	4Power Indicators		
Switch function	Low - High - SMD - OFF		
Operating time	10h(Low) - 3h(High) - 13h(SMD)		
Charging time	4.5h		
Charging Port	Micro USB		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	190x59x34		
Weight(g)	263		



Item No.	6788		
Light source	SMD + COB		
Lumen	70lm(Low)	240lm(High)	55lm(SMD)
CRI	70		
Color temperature	5500 - 7500K		
Battery	3.7V 2200mAh		
Charging indicator	4Power Indicators		
Switch function	Low - High - SMD - OFF		
Operating time	10h(Low) - 3h(High) - 13h(SMD)		
Charging time	4h		
Charging Port	Micro USB		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	173x53.5x34		
Weight(g)	195		

Item No.	6790		
Light source	SMD + COB		
Lumen	40lm(Low)	150lm(High)	55lm(SMD)
CRI	70		
Color temperature	5500 - 7500K		
Battery	3.7V 750mAh		
Charging indicator	4Power Indicators		
Switch function	Low - High - SMD - OFF		
Operating time	7h(Low) - 2h(High) - 4h(SMD)		
Charging time	2h		
Charging Port	Micro USB		
IP/ IK rating	IPX0 / IK07		
Dimension(mm)	156x30x23		
Weight(g)	84		



RETRACTABLE WORKLIGHT



CONTRACTION STATE



Item No.	6639	
Light source	SMD + COB	
Lumen	160lm(SMD)	500lm(COB)
CRI	70	
Color temperature	5000 - 7000K	
Battery	3.7V 1500mAh	
Charging indicator	Red - Green	
Switch function	SMD - OFF	COB - OFF
Operating time	4h(SMD) / 2h(COB)	
Charging time	3h	
Charging Port	Micro USB	
IP/ IK rating	IPX0 / IK07	
Dimension(mm)	45.2x29.5x108.2(142)	
Weight(g)	175	

Item No.	6635			
Light source	COB + SMD			
Lumen	800lm(High)	400lm(Mid)	150lm(Low)	150lm(SMD)
CRI	70			
Color temperature	5000 - 7000K			
Battery	3.7V 4000mAh			
Charging indicator	4 Power Indicators			
Switch function	High - Mid - Low - SMD - OFF			
Operating time	2h(Low) - 7h(Mid) - 12h(High) - 8.5h(SMD)			
Charging time	5h			
Charging Port	USB-C			
IP/ IK rating	IPX3 / IK07			
Dimension(mm)	146.5x56x27			
Weight(g)	201			

Item No.	6634		
Light source	COB + SMD		
Lumen	160lm(Low)	500lm(High)	150lm(SMD)
CRI	70		
Color temperature	5000 - 7000K		
Battery	3.7V 2000mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - High - SMD - OFF		
Operating time	10h(Low) - 3h(High) - 6h(SMD)		
Charging time	3.5h		
Charging Port	USB-C		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	119x58x28.8		
Weight(g)	140		



WIRELESS CHARGING WORKLIGHT (Charging Base)

6636

Charger adapter 5v-1a
(suitable for most mobile phones and wireless charging devices on the market).

Charging interface type-C

Switching switch:
the product will be charged automatically after being put on, and it will be cut off automatically after filling.

Low power alarm function:
(charging error, product position not in the right position)

Dimension: 164.5x80x14 mm

Weight: 101.5g



MULTI FUNCTIONAL
WORKLIGHT

- The light strip can rotate 180 degrees and be folded up for easy storage and portability.
- The bottom is equipped with a pull-out clamp function, which can be fixed to different thicknesses of plates, and the maximum stretching size can reach 45MM.
- The magnet at the bottom can be attached to the engine hood, tool rack, etc., and the hook can be hung.



Item No.	6620			
Light source	COB SMD			
Lumen	400lm(White)	10lm(Red)	50lm(Top)	160lm(SMD)
CRI	80	-	70	80
Color temperature	5500 - 7500K			
Battery	3.7V 2600mAh			
Charging indicator	4 Power Indicators			
Switch function	(COB)White - Red - Top - OFF SMD - OFF			
Operating time	3.5h(White) - 20h(Red) - 40h(Top) - 10h(SMD)			
Charging time	4h			
Charging Port	USB-C			
IP/ IK rating	IPX0 / IK07			
Dimension(mm)	158x31x45			
Weight(g)	180			



Item No.	6624				6741				6672			
Light source	COB SMD				COB SMD				COB SMD			
Lumen	240lm(White)	12lm(Red)	50lm(Top)	160lm(SMD)	400lm(White)	200lm(Warm)	60lm(Top)	160lm(SMD)	800lm(White)	10lm(Red)	50lm(Top)	150lm(SMD)
CRI	80	-	70	80	80	90	80	70	80	-	70	80
Color temperature	5500 - 7500K				5500 - 7500K 2500 - 3500K				5500 - 7500K			
Battery	3.7V 1200mAh				3.7V 2600mAh				3.65V 4000mAh			
Charging indicator	4 Power Indicators				4 Power Indicators				4 Power Indicators			
Switch function	(COB)White-Red-Top-OFF SMD-OFF				(COB)White-Warm-Top-OFF SMD-OFF				(COB)White-Red-Top-OFF SMD-OFF			
Operating time	3h(White)-12h(Red)-20h(Top)-4.5h(SMD)				5h(White)-6h(Warm)-35h(Top)-10h(SMD)				3h(White)-20h(Red)-15h(Top)-35h(SMD)			
Charging time	2h				4h				5h			
Charging Port	USB-C				USB-C				USB-C			
IP/ IK rating	IPX0 / IK07				IPX0 / IK07				IPX0 / IK07			
Dimension(mm)	130x27x41				158x31x45				183x39x54			
Weight(g)	119				180				290			

Item No.	6667		
Light source	COB SMD		
Lumen	70lm	200lm	40lm(SMD)
CRI	80	80	70
Color temperature	5500 - 7500K		
Battery	3.7V 650mAh		
Charging indicator	Red - Green		
Switch function	Low(COB) - High(COB) - SMD - OFF		
Operating time	9h(Low) - 2.5h(High) - 7h(SMD)		
Charging time	2h		
Charging Port	USB-C		
IP/ IK rating	IPX0 / IK07		
Dimension(mm)	166x40x21		
Weight(g)	78		



DISTANCE SENSING SLIM LIGHT

Item No.	6685			
Light source	COB + SMD			
Lumen	1200lm	600lm	80lm	100lm
CRI	65			
Color temperature	5500 - 7500K			
Battery	3.7V 2000mAh			
Charging indicator	Red - Green			
Switch function	High - Mid - Low - SMD - OFF			
Operating time	1.5h(High) - 5.5h(Mid) - 10h(Low) - 12h(SMD)			
Charging time	3h			
Charging Port	USB-C			
IP/ IK rating	IPX7 / IK07			
Dimension(mm)	115x46x26			
Weight(g)	147			

ODS

Obstacle Detection System

Due to proximity sensor, the worklight turn off automatically when an obstacle (paper, box, bag, textile, tools, wall, ground, etc.) is monitored at close range from light source. Avoid potential safety risk.



SLIM LIGHT

Item No.	6685-A			
Light source	COB + SMD			
Lumen	1200lm	600lm	80lm	100lm
CRI	65			
Color temperature	5500 - 7500K			
Battery	3.7V 2000mAh			
Charging indicator	Red - Green			
Switch function	High - Mid - Low - SMD - OFF			
Operating time	1.5h(High) - 5.5h(Mid) - 10h (Low) - 12h(SMD)			
Charging time	3h			
Charging Port	USB-C			
IP/ IK rating	IPX7 / IK07			
Dimension(mm)	115x46x26			
Weight(g)	147			



Item No.	6784		
Light source	SMD		
Lumen	200lm	60lm	70lm(SMD)
CRI	70lm		
Color temperature	5500 - 7500K		
Battery	3.7V 800mAh		
Charging indicator	Red - Green		
Switch function	High - Low - SMD - OFF		
Operating time	3h(Low) - 5h(High) - 5h(SMD)		
Charging time	3h		
Charging Port	Micro USB		
IP/ IK rating	IPX0 / IK07		
Dimension(mm)	100.5x17.5x26		
Weight(g)	43.5		



Item No.	6795	
Light source	CREE XPG	
Lumen	60lm	200lm
CRI	-	
Color temperature	-	
Battery	3.7V 1800mAh	
Charging indicator	Red - Green	
Switch function	Low - High - OFF	
Operating time	10h(Low) - 3h(High)	
Charging time	3.5h	
Charging Port	Micro USB	
IP/ IK rating	IPX3 / IK07	
Dimension(mm)	106x48x36.5	
Weight(g)	113	

Item No.	6698		
Light source	COB + SMD		
Lumen	100lm	500lm	100lm(SMD)
CRI	70		
Color temperature	5000 - 7000K		
Battery	3.7V 1200mAh		
Charging indicator	Red - Green		
Switch function	Low - High - SMD - OFF		
Operating time	5h(Low) - 1.5h(High) - 11h(SMD)		
Charging time	3h		
Charging Port	USB - C		
IP/ IK rating	IPX5 / IK07		
Dimension(mm)	97x29x20.6		
Weight(g)	98		

HANDHELD STICK LIGHT

- Long & thin design, making it easy to carry and apply.
- Hook & rear magnet are suitable for various environments.
- Sturdy & durable Aluminum alloy housing.



Item No.	6606		6616	
Light source	COB		COB	
Lumen	360lm	180lm	250lm	120lm
CRI	-		-	
Color temperature	-		-	
Battery	3.7V 1800mAh		3.7V 780mAh	
Charging indicator	Red - Green		Red - Green	
Switch function	High - Low - Strobe - OFF		High - Low - Strobe - OFF	
Operating time	3.5h(High) - 8h(Low)		1.5h(High) - 3h(Low)	
Charging time	4h		4h	
Charging Port	Micro USB		Micro USB	
IP/ IK rating	IPX4 / IK07		IPX4 / IK07	
Dimension(mm)	249x32.5x10.5		195x26x10.5	
Weight(g)	120		71	

MULTIFUNCTIONAL HANDHELD WORKLIGHT

- Cylindrical design allows various lighting placements.
- Dual lights sources, it can be used as handheld lighting or flashlight.
- The rear magnets can be used in multiple scenarios such as engine hood and shelves.



Item No.	6665			6675		
Light source	SMD + Seoul M4			SMD + Seoul M4		
Lumen	1000lm(White)	50lm(Red)	400lm(M4)	1200lm(White)	50lm(Red)	400lm(M4)
CRI	-			-		
Color temperature	-			-		
Battery	3.7V 2600mAh			3.7V 4400mAh		
Charging indicator	Red - Green			Red - Green		
Switch function	White - Red - M4 - OFF			White - Red - M4 - OFF		
Operating time	2h(White) - 8h(Red) - 3.3h(M4)			3.5h(White) - 15h(Red) - 7h(M4)		
Charging time	4h			6h		
Charging Port	USB-C			USB-C		
IP/ IK rating	IPX4 / IK07			IPX4 / IK07		
Dimension(mm)	41x41x286			41x41x486		
Weight(g)	245			450		

RECHARGEABLE WORKLIGHT

- Multi-function, it can be used as flashlight, warning light, power-bank, etc.
- Applied with a power indicator, timely reminding users to charge and maintain.
- The battery is detachable for easy replacement.



Stand(Adjustable)



White Light



Red Light



Can be Mounted

Item No.	6677			
Light source	LUXEON V2 + COB			
Lumen	200(LED-Low)	600(LED-High)	400(COB-Low)	1000(COB-High)
CRI	LUXEON V2 70 COB 80			
Color temperature	6000 - 7000K			
Battery	3.65V 8000mAh			
Charging indicator	4 Power Indicators			
Switch function	Low - High - OFF (LUXEON V2) Low - High - Red - OFF (COB)			
Operating time	25h(LED-Low)	4.5h(LED-High)	15h(COB-Low)	8h(COB-High)
Charging time	6h			
Charging Port	USB-C			
IP/ IK rating	IPX4 / IK07			
Dimension(mm)	213x132x106			
Weight(g)	708			

NECK WORKLIGHT

- Using high performance LEDs.
- Applied with dual lights sources and two buttons which can be controlled separately.
- Applied with hoses which can adjust the direction 360 degrees separately.
- It can be placed around the neck for usage.
- The magnets & hole on the base are suitable for various occasions.



Item No.	6633	
Light source	OSRAM	
Lumen	150lm	300lm
CRI	70	
Color temperature	6000 - 7000K	
Battery	3.7V 2000mAh	
Charging indicator	Red - Green	
Switch function	(Single / Dual) ON - OFF (Dual Switch Separate Control)	
Operating time	10h(Single) - 5h(Dual)	
Charging time	4h	
Charging Port	USB-C	
IP/ IK rating	IPX0 / IK07	
Dimension(mm)	185x145x45	
Weight(g)	223	



Can Be Mounted



Arbitrary Distortion


FOLDABLE WORKLIGHT

- The light strip can rotate 360 degrees and be folded up for easy storage and portability.
- Internal and external dual light source design, suitable for multiple environmental needs.
- The magnet at the bottom can be attached to the engine hood, tool rack, etc.



360° rotation, multi angle lighting.

Item No.	7549		
Light source	COB + SMD		
Lumen	1200lm(White)	300lm(Warm)	100lm(SMD)
CRI	80	90	70
Color temperature	5500 - 6500K	3000 - 4000K	5500 - 6500K
Battery	3.65V 5000mAh		
Charging indicator	Red - Green		
Switch function	White - Warm - SMD		
Operating time	5h(White) - 9h(Warm) - 28h(SMD)		
Charging time	3.5h		
Charging Port	USB-C		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	38x34.5x340.5		
Weight(g)	298.4		

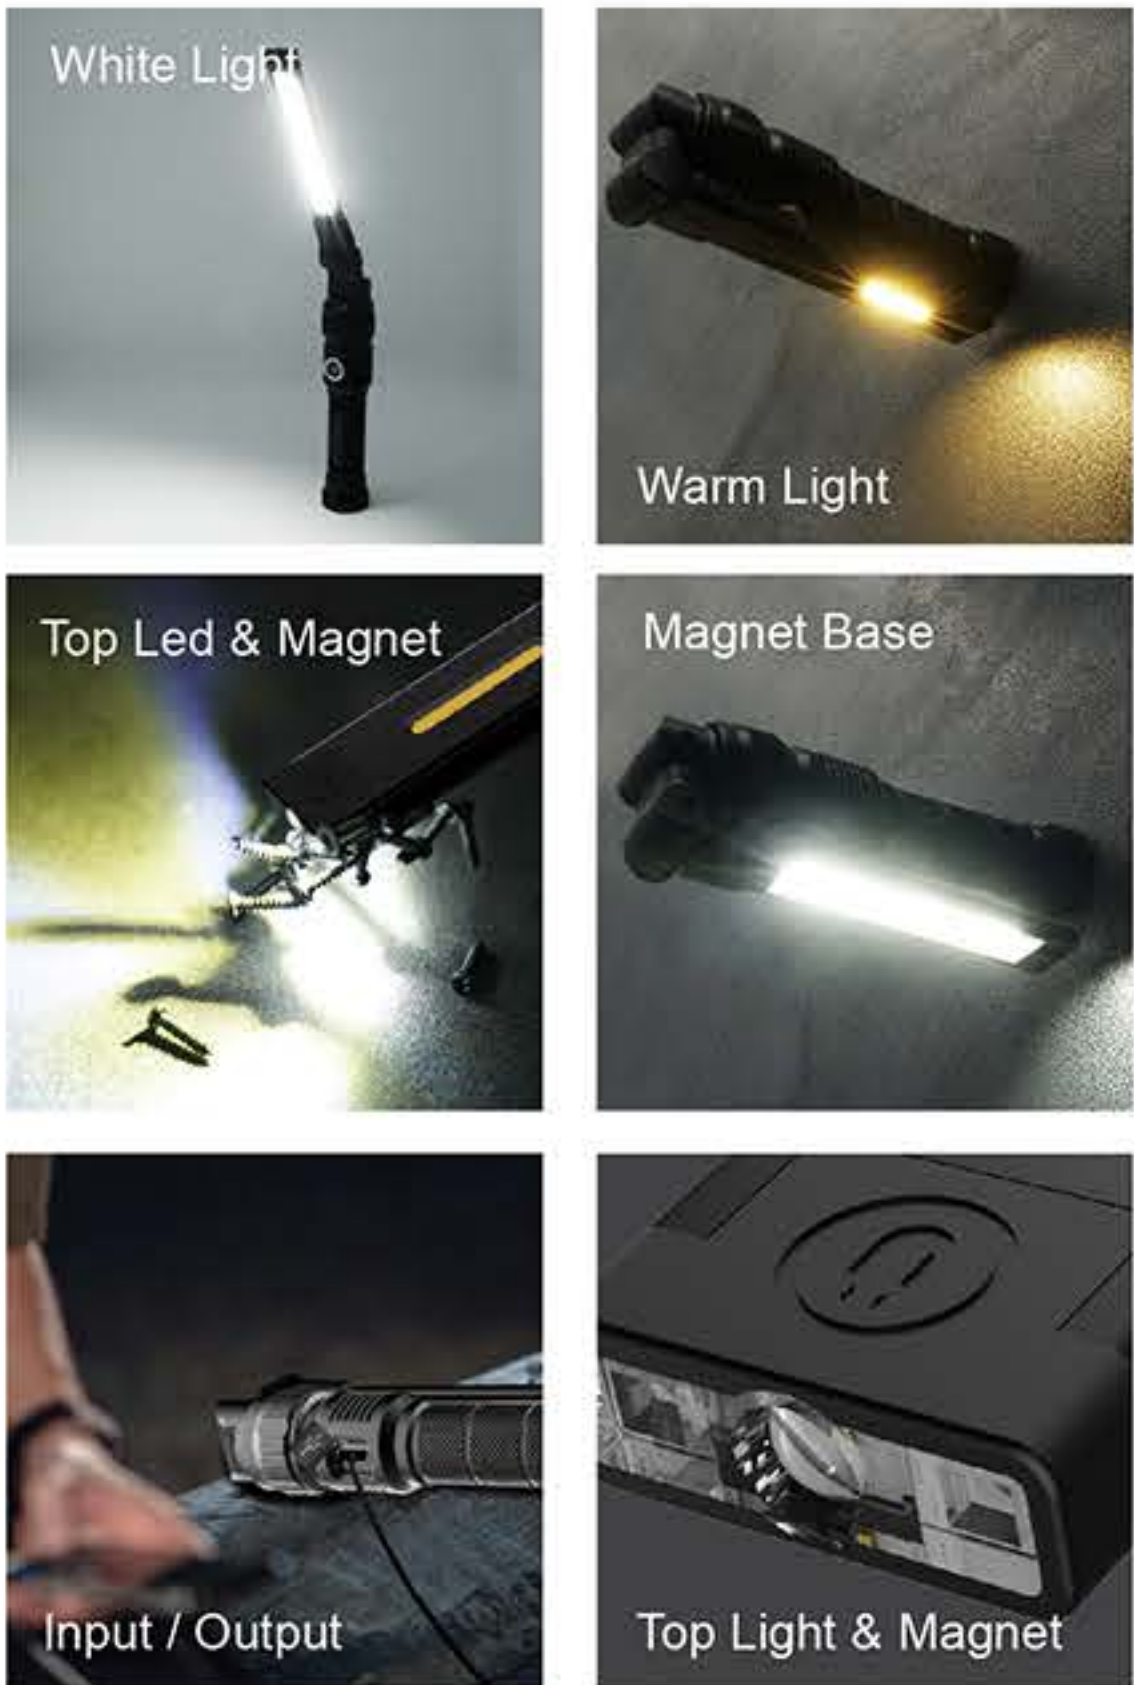

Item No.	7711	
Light source	OSRAM	
Lumen	300lm	100lm
CRI	65	
Color temperature	6000 - 7000K	
Battery	3 x AA	
Charging indicator	-	
Switch function	High - Low - OFF	
Operating time	10h(High) - 24h(Low)	
Charging time	-	
Charging Port	-	
IP/ IK rating	IPX4 / IK06	
Dimension(mm)	45x45x625	
Weight(g)	344	



Item No.	7647-A	
Light source	CREE XPG	
Lumen	125lm	230lm
CRI	-	
Color temperature	-	
Battery	3.7V 2200mAh	
Charging indicator	Red - Green	
Switch function	Low - High - OFF	
Operating time	8h(Low) - 4.5h(High)	
Charging time	4h	
Charging Port	Micro USB	
IP/ IK rating	IPX3 / IK07	
Dimension(mm)	30x30x650	
Weight(g)	265	

Item No.	7543-1	
Light source	COB	
Lumen	175lm	350lm
CRI	-	
Color temperature	-	
Battery	3.7V 2200mAh	
Charging indicator	Red - Green	
Switch function	Low - High - OFF	
Operating time	4h(Low) - 2h(High)	
Charging time	4h	
Charging Port	Micro USB	
IP/ IK rating	IPX0 / IK07	
Dimension(mm)	35x35x337	
Weight(g)	225	



360° rotation, Multi angle lighting.

MULTI-FUNCTION WORKLIGHT



Item No.	6756			
Light source	SMD + COB			
Lumen (COB)	200lm(COB)	800lm(COB)	50lm(SMD)	300lm(SMD)
CRI	80			
Color temperature	6000 - 7000K			
Battery	3.7V 2600mAh			
Charging indicator	4 Power Indicators			
Switch function	Low - High(COB) - Low - High(SMD) - OFF			
Operating time	COB 10h(Low) - 2.5h(High) SMD 20h(Low) - 4h(High)			
Charging time	4h			
Charging Port	USB-C			
IP/ IK rating	IPX4 / IK07			
Dimension(mm)	140x55x34			
Weight(g)	195.5			



SMALL PLASTIC WORKLIGHT



Item No.	6652		
Light source	COB + SMD		
Lumen	170lm	500lm	150lm
CRI	70		
Color temperature	COB 5000 - 6500K SMD 6000 - 7000K		
Battery	3.7V 2000mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - High - SMD - OFF		
Operating time	10h(Low) - 3h(High) - 8h(SMD)		
Charging time	3h		
Charging Port	USB-C		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	101x53x25		
Weight(g)	99.5		



Item No.	6697	6697-A	6697-B
Light source	Jingrui XG2	HL2X	HL2X
Lumen	5lm(Low)- 50lm(Mid) -150lm(High) -400(Turbo)	10lm(Low)- 70lm(Mid)- 210lm(High)- 500(Turbo)	10lm(Low)- 70lm(Mid)- 210lm(High)- 500(Turbo)
CRI	65	70	70
Color temperature	6000 - 7000K	6000 - 7000K	6000 - 7000K
Battery	3.7V 300mAh	3.7V 400mAh	3.7V 500mAh
Charging indicator	Red - Green	Red - Green	Red - Green
Switch function	Low - Mid - High - OFF	Low - Mid - High - OFF	Low - Mid - High - OFF
Operating time	8h(Low)- 2h(Mid)- 0.6h(High)- 30s(Turbo)	14h(Low)- 3.5h(Mid)- 1h(High)- 30s(Turbo)	14h(Low)- 4h(Mid)- 1.5h(High)- 30s(Turbo)
Charging time	2.5h	3.5h	4h
Charging Port	USB-C	USB-C	USB-C
IP/ IK rating	IPX3 / IK07	IPX3 / IK07	IPX3 / IK07
Dimension(mm)	60x27.5x15	70x27.5x15	75x27.5x15
Weight(g)	34	39	43



Item No.	6680
Light source	SMD
Lumen	50lm(Low) - 150lm(High)
CRI	80
Color temperature	-
Battery	3.7V 200mAh
Charging indicator	Red - Green
Switch function	Low - High - Red - OFF
Operating time	4h(Low) - 2h(High)
Charging time	1h
Charging Port	USB-C
IP/ IK rating	IPX5 / IK07
Dimension(mm)	28x10x57
Weight(g)	22

Item No.	7756
Light source	Sumsung
Lumen	10lm(Low) - 100lm(High)
CRI	70
Color temperature	5500 - 6500K
Battery	3.7V 100mAh
Charging indicator	Red - Green
Switch function	Low - High - OFF
Operating time	3h(Low) - 0.2h(High)
Charging time	0.5h
Charging Port	USB-C / Micro USB
IP/ IK rating	IPX0 / IK07
Dimension(mm)	28.4x28.4x32.1
Weight(g)	28

DUAL POWER HEADLAMP



NON-SLIP DESIGN

55°
SWIVEL



Item No.	6578
Light source	COB + SMD
CRI	65
Color temperature	5000 - 8000K
Charging indicator	Red - Green
Switch function	High - Low - COB - All ON - OFF
Charging Port	Micro USB
IP / IK Rating	IPX4 / IK07
Dimension(mm)	68x39x40
Weight(g)	112.5

3xAAA Battery Parameters

Lumen	400lm(High)	120lm(Low)	200lm(SMD)	470lm(ALL)
Battery	3 x AAA			
Operating time	2h(High)	10h(Low)	4h(SMD)	1.2h(ALL)
Charging time	-			

Lithium Battery Parameters

Lumen	400lm(High)	120lm(Low)	200lm(SMD)	500lm(ALL)
Battery	3.7V 1000mAh			
Operating time	2h(COB-H)	10h(COB-L)	4h(SMD)	1.2h(ALL)
Charging time	2.5h			

Item No.	6566			
Light source	COB + SMD			
Lumen	300lm(High)	90lm(Low)	180lm(COB)	400lm(ALL)
CRI	65			
Color temperature	6000 - 7000K			
Battery	3 x AAA			
Charging indicator	-			
Switch function	High - Low - COB - All ON - OFF			
Operating time	2h(High)	12h(Low)	4.5h(SMD)	1.2h(ALL)
Charging time	-			
Charging Port	-			
IP/ IK rating	IPX4 / IK07			
Dimension(mm)	64x39x40			
Weight(g)	52			



Item No.	6569			
Light source	COB + SMD			
Lumen	600lm(High)	250lm(Low)	250lm(COB)	800lm(ALL)
CRI	65			
Color temperature	5000 - 7000K			
Battery	3.7V 2200mAh			
Charging indicator	Red - Green			
Switch function	High - Low - COB - All ON - OFF			
Operating time	3h(High)	8h(Low)	5h(SMD)	2.5h(ALL)
Charging time	4h			
Charging Port	Micro USB			
IP/ IK rating	IPX4 / IK07			
Dimension(mm)	82x41x53.5			
Weight(g)	72(Without Strap)			



Item No.	6567			
Light source	COB + SMD			
Lumen	300lm(High)	90lm(Low)	250lm(COB)	480lm(ALL)
CRI	65			
Color temperature	6000 - 7000K			
Battery	3.7V 1400mAh			
Charging indicator	Red - Green			
Switch function	High - Low - COB - All ON - OFF			
Operating time	3h(COB-H)	10h(COB-L)	3.5h(SMD)	1.2h(ALL)
Charging time	2.5h			
Charging Port	Micro USB			
IP/ IK rating	IPX4 / IK07			
Dimension(mm)	67x37x40			
Weight(g)	97.7			




PORTABLE HEADLAMP

- The product has high beam, Low beam and red light warning functions.
- Portable headlamps, lightweight and compact.



6656

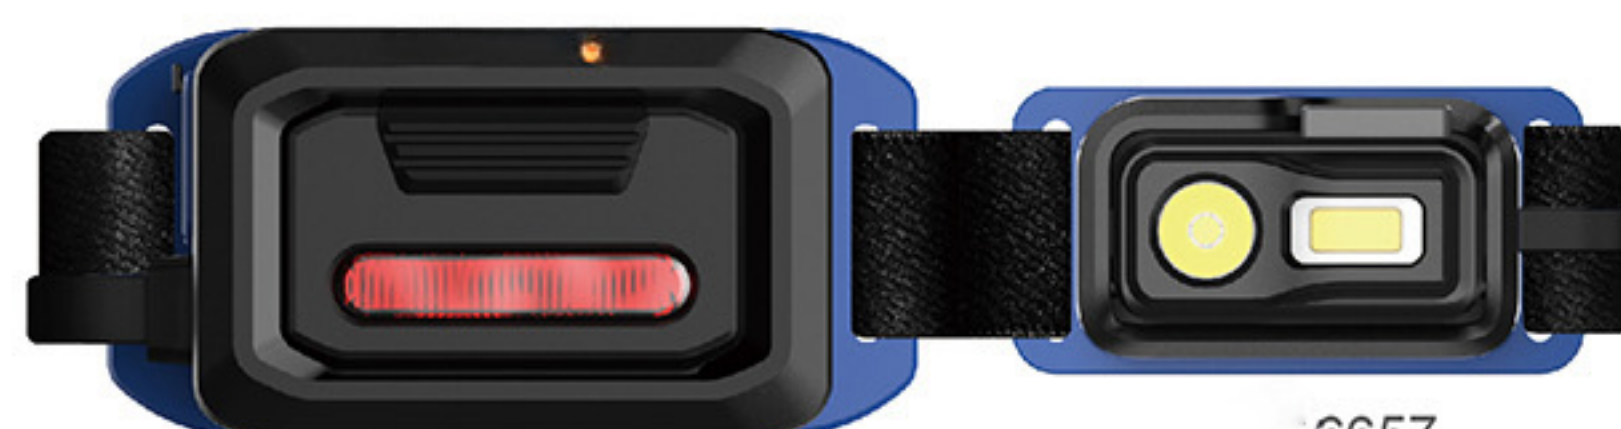

6657

Item No.	6656			6657		
Light source	SMD + COB			SMD + COB		
Lumen	80lm(Low)	250lm(High)	130lm(COB)	90lm(Low)	250lm(High)	130lm(COB)
CRI	70			70		
Color temperature	5000 - 7000K			5000 - 7500K		
Battery	3 x AAA			3.7V 1500mAh		
Charging indicator	-			Red - Green		
Switch function	Low - High - COB - COB(Red) - OFF			Low - High - COB - COB(Red) - OFF		
Operating time	12h(Low) - 3.5h(High) - 2.5h(COB)			13h(Low) - 3.5h(High) - 2.5h(COB)		
Charging time	-			2.5h		
Charging Port	-			USB-C		
IP/ IK rating	IPX4 / IK07			IPX4 / IK07		
Dimension(mm)	62x31x18(Front) 82x43.8x19(Back)			62x31x18(Front) 82x42x19(Back)		
Weight(g)	59			92		

Item No.	6543	
Light source	COB	
Lumen	150lm	50lm
CRI	70	
Color temperature	5500 - 6500K	
Battery	3.7V 2200mAh	
Charging indicator	Red - Green	
Switch function	High - Low - Strobe - OFF	
Operating time	4h(High) - 12h(Low)	
Charging time	4h	
Charging Port	Micro USB	
IP/ IK rating	IPX4 / IK07	
Dimension(mm)	80x48x38	
Weight(g)	60	



Item No.	6544	
Light source	COB	
Lumen	150lm	50lm
CRI	70	
Color temperature	5500 - 6500K	
Battery	3.7V 2200mAh	
Charging indicator	Red - Green	
Switch function	High - Low - Strobe - OFF	
Operating time	4h(High) - 12h(Low)	
Charging time	4h	
Charging Port	Micro USB	
IP/ IK rating	IPX4 / IK07	
Dimension(mm)	80x48x38	
Weight(g)	60	

SENSOR MODE

Item No.	6543-3AAA	
Light source	COB	
Lumen	150lm	50lm
CRI	70	
Color temperature	5500 - 6500K	
Battery	3 x AAA	
Charging indicator	-	
Switch function	High - Low - Strobe - OFF	
Operating time	5h(High) - 18h(Low)	
Charging time	-	
Charging Port	-	
IP/ IK rating	IPX4 / IK07	
Dimension(mm)	61x45x31	
Weight(g)	50	



INDUSTRIAL HEADLAMP



Item No.	6597
Light source	SMD + COB
Lumen	200lm(Low) - 500lm(High) SMD/COB 800lm(All)
CRI	70
Color temperature	5500 - 7500K
Battery	3.7V 2000mAh
Charging indicator	Red - Green
Switch function	Low- High(SMD)- Low- High- Red(COB)- All- OFF
Operating time	(Low) 8h - (High) 3h - (All) 2h
Charging time	3h
Charging Port	USB-C
IP/ IK rating	IPX6 / IK07
Dimension(mm)	81.5x43x45
Weight(g)	105



FOCUS HEADLAMP




Item No.	6587
Light source	SMD
Lumen	10lm(Low) 150lm(Mid) 450lm(High)
CRI	70
Color temperature	5500 - 7500K
Battery	3.7V 2000mAh
Charging indicator	Red - Green
Switch function	Low - Mid - High(White) - Red - Red Strobe - OFF
Operating time	80h(Low)-10h(Mid)-3h(High)-10h(Red)-20h(Red Strobe)
Charging time	4h
Charging Port	USB-C
IP/ IK rating	IPX4 / IK07
Dimension(mm)	48x78x48
Weight(g)	107




PORTABLE HEADLAMP

- The product has high beam, Low beam and red light warning functions.
- Portable headlights, lightweight and compact.


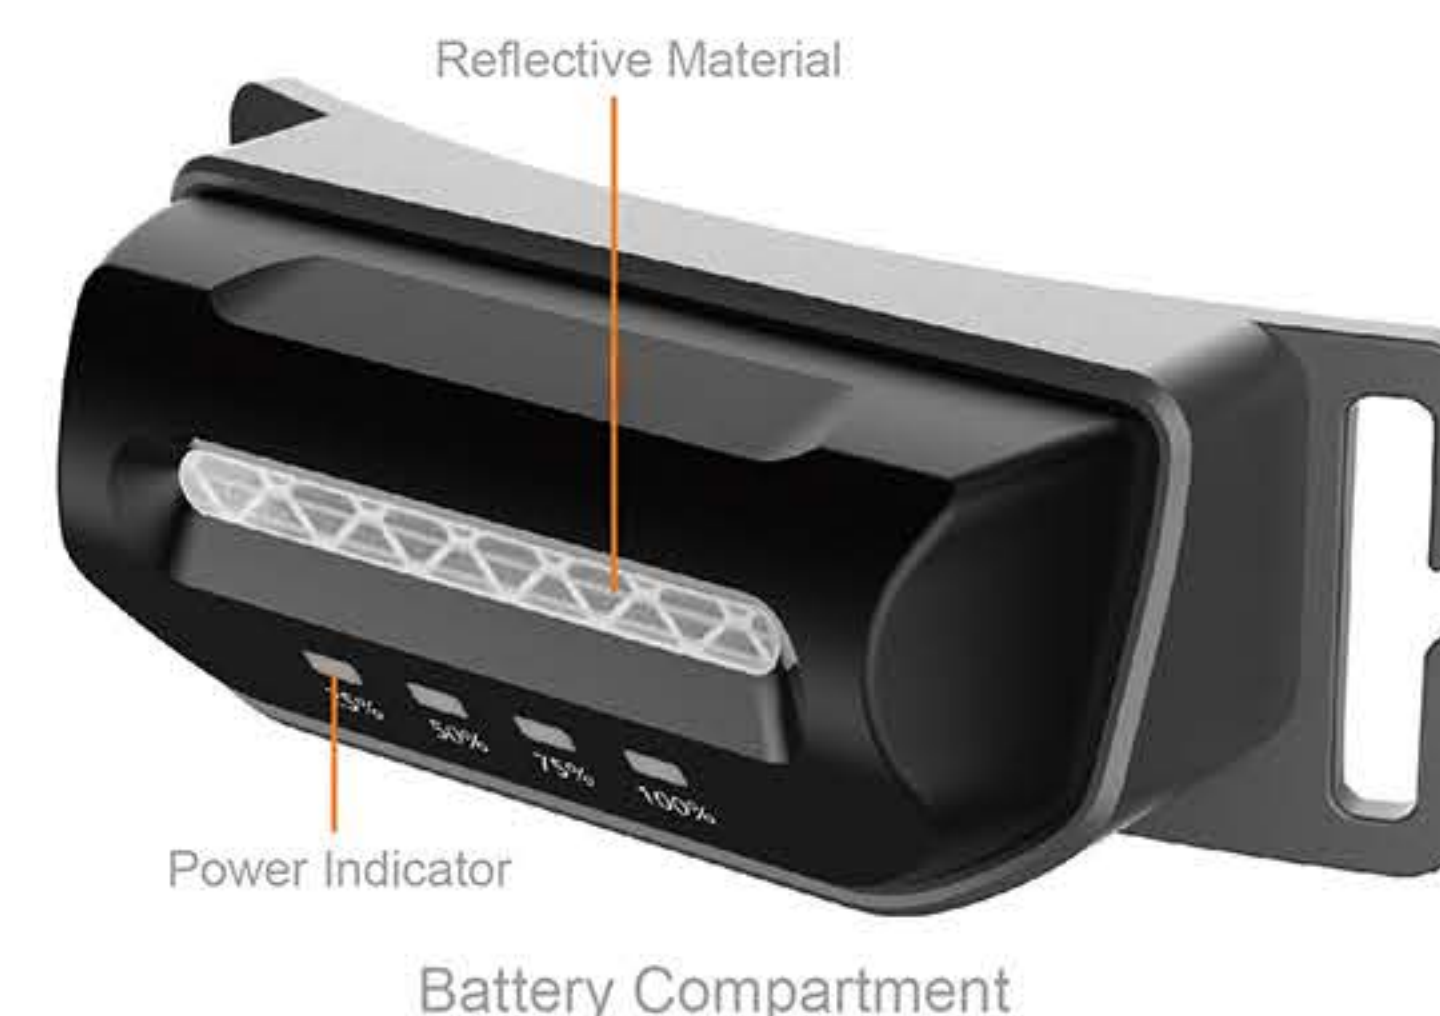


Item No.	6703
Light source	SMD + COB
Lumen	500lm(High) 200lm(Low) 500lm(COB) 1000lm(All) 50lm(Red)
CRI	70 70 80 70
Color temperature	5000 - 7000K 5000 - 7000K 5500 - 6500K 5000 - 7000K
Battery	3.7V 2600mAh
Charging indicator	4Power Indicators
Switch function	High(SMD) - Low(SMD) - COB - All - Red - OFF
Operating time	5h(High) - 8h(Low) - 4.5h(COB) - 3.5h(All) - 3h(Red)
Charging time	4h
Charging Port	USB-C
IP/ IK rating	IPX4 / IK07
Dimension(mm)	27x29x58(Front) 31.5x32x93(Back)
Weight(g)	138.5

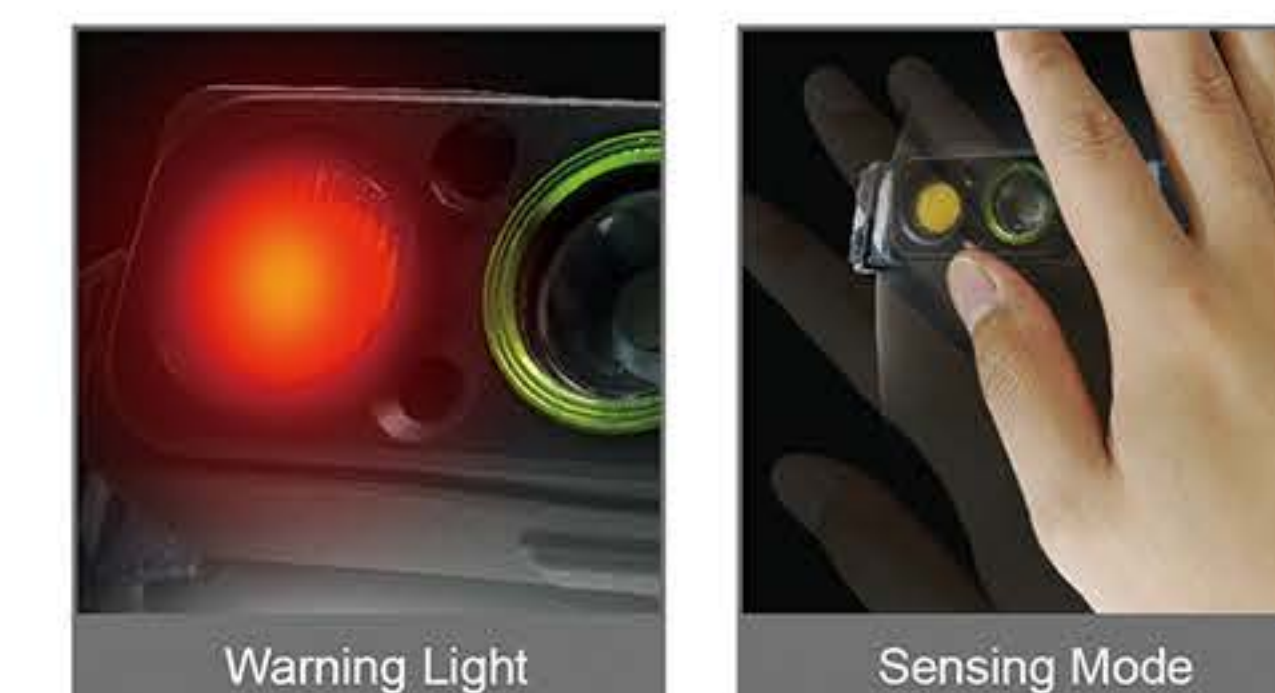

SLIM HEADLAMP

- Applied with a clip, it can be bound with the cap or handlight band.
- Multi light sourcings, red light, white light in low/high beam.
- Applied with a battery indicator and sensing function.

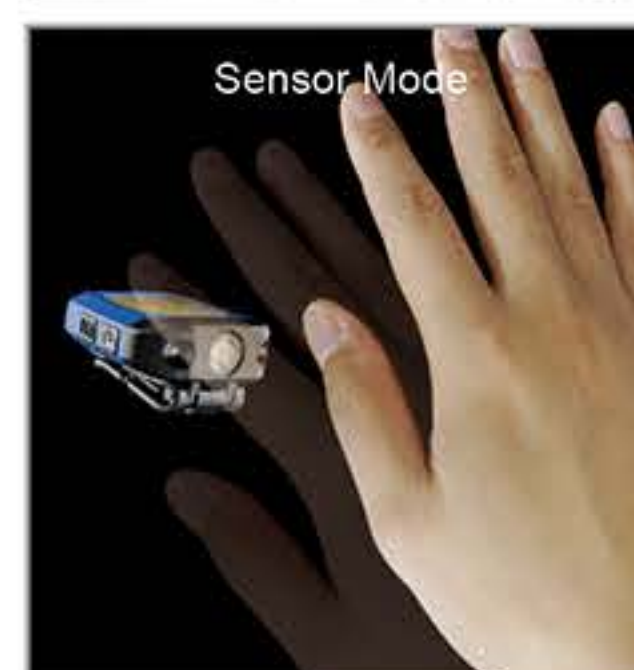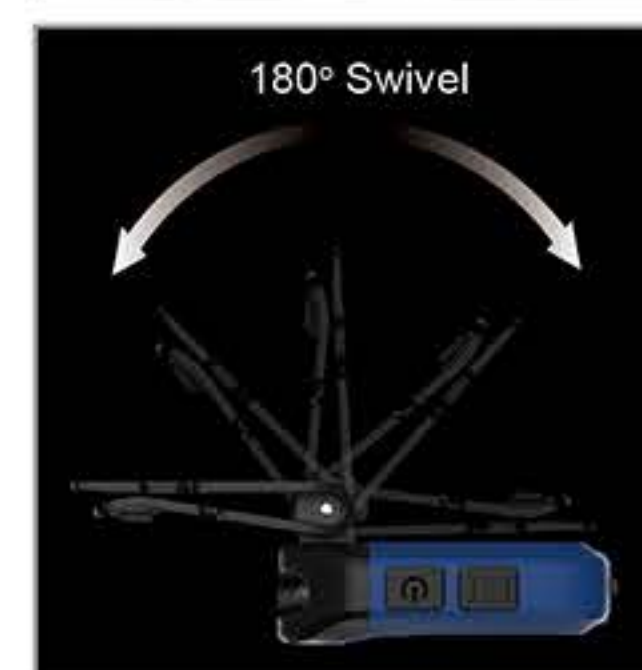

Item No.	6681			
Light source	SMD + Jingrui XG2			
Lumen	40lm(Low)	200lm(High)	3lm(Red)	150lm(XG2)
CRI	80			
Color temperature	5500 - 7500K			
Battery	3.7V 500mAh			
Charging indicator	Red - Green			
Switch function	Low - High - Red - XG2 - OFF			
Operating time	12h(Low) - 2h(High) - 20h(Red) - 2h(XG2)			
Charging time	1.5h			
Charging Port	USB-C			
IP/ IK rating	IPX4 / IK07			
Dimension(mm)	52x49x25			
Weight(g)	36			

ONLY **39G**

COMPACT , PORTABLE
(Including headband and battery)



Item No.	6570					
Light source	SMD + COB					
Lumen	SMD			COB		
	5lm	45lm	120lm	5lm	60lm	140lm
CRI	80					
Color temperature	6000 - 7000K					
Battery	3.7V 500mAh					
Charging indicator	Red - Green					
Switch function	Low - Mid - High - OFF(SMD)			Low-Mid-High-Red-Red Strobe-O		
Operating time	15h(Low)-2.5h(Mid)-1.5h(High)			15h(Low)-2h(Mid)-1h(High)		
Charging time	2h					
Charging Port	Micro USB					
IP/ IK rating	IPX4 / IK07					
Dimension(mm)	62x31x21					
Weight(g)	39					



Item No.	6552-B					
Light source	CREE XPG + COB					
Lumen	85lm(Low) - 250lm(High) (CREE XPG/COB)					
CRI	80					
Color temperature	6000 - 6500K					
Battery	3 x AAA					
Charging indicator	-					
Switch function	Low - High - Strobe - OFF (CREE XPG/COB)					
Operating time	10h(Low) - 3h(High)					
Charging time	-					
Charging Port	-					
IP/ IK rating	IPX4 / IK07					
Dimension(mm)	66x46x38					
Weight(g)	64					



Elastic headband

Item No.	6599					
Light source	SMD					
Lumen	20(Low) - 180(High)					
CRI	80					
Color temperature	5500 - 7000K					
Battery	2 x AAA					
Charging indicator	-					
Switch function	Low - High - OFF					
Operating time	7h(Low) - 1h(High)					
Charging time	-					
Charging Port	-					
IP/ IK rating	IPX4 / IK07					
Dimension(mm)	61x35x37					
Weight(g)	45					



Item No.	7729					
Light source	CREE XPG					
Lumen	350lm(High) - 120lm(Low)					
CRI	-					
Color temperature	-					
Battery	3.7V 700mAh					
Charging indicator	Red - Green					
Switch function	High - Low - Strobe - OFF					
Operating time	1.5h(High) - 4h(Low)					
Charging time	2.5h					
Charging Port	Magnetic Charging					
IP/ IK rating	IPX3 / IK07					
Dimension(mm)	80x20x26					
Weight(g)	90					

ALUMINUM ALLOY PENLIGHT

- Dual lights design, spotlight & floodlight.
- The clip with magnet is suitable for various occasions.
- Rotating clip allows usage in different angles for lighting.



Item No.	7795		
Light source	COB + SMD		
Lumen	90lm(SMD)	100lm(COB-Low)	250lm(COB-High)
CRI	70		
Color temperature	5500 - 6500K		
Battery	3.7V 500mAh		
Charging indicator	Red - Green		
Switch function	SMD - COB Low - High - OFF		
Operating time	5h(Top) - 5h(COB-Low) - 1.5h(COB-High)		
Charging time	2.5h		
Charging Port	USB-C		
IP/ IK rating	IPX2 / IK07		
Dimension(mm)	15.8x20x135		
Weight(g)	45.4		




ALUMINUM ALLOY PENLIGHT

- Dual lights design, spotlight & floodlight.
- Applied with a pen clip, it can be clipped to the pocket or something else.

Item No.	6615-C	
Light source	SMD + COB	
Lumen	180lm(SMD)	300lm(COB)
CRI	70	
Color temperature	5500 - 7500K	
Battery	3.7V 650mAh	
Charging indicator	Red - Green	
Switch function	SMD - COB - OFF	
Operating time	2h(SMD) - 2h(COB)	
Charging time	2h	
Charging Port	Micro USB	
IP/ IK rating	IPX0 / IK07	
Dimension(mm)	21x20x174	
Weight(g)	58	



Item No.	7669	
Light source	OSRAM	
Lumen	120lm	25lm
CRI	-	
Color temperature	-	
Battery	3.7V 500mAh	
Charging indicator	Red - Green	
Switch function	High - Low - OFF	
Operating time	2.5h(High) - 15h(Low)	
Charging time	1.5h	
Charging Port	Micro USB	
IP/ IK rating	IPX4 / IK07	
Dimension(mm)	15.2x18x151	
Weight(g)	57	

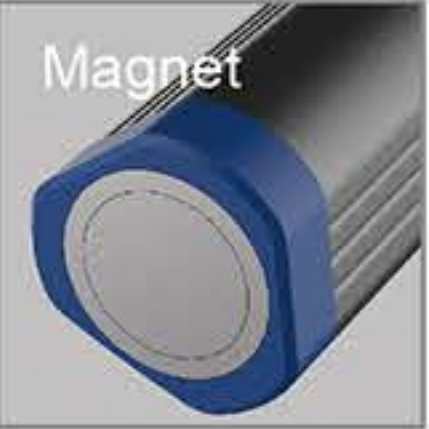

MINI PENLIGHT

- It has the function of a flashlight, the pen holder can rotate freely, and the pen holder with a magnetic suction can adsorb and fix the work light for multiple purposes.

- Adopting high light efficiency COB and LED lighting.

- Adopting a multi light source design, red light plus white light, low beam plus high beam, suitable for different lighting environments.



DROP TEST



FLOOD LIGHT



SPOT LIGHT

360°
Swivel

90°
Swivel



Item No.	6695			
Light source	COB + SMD			
Lumen	100lm(Low)	250lm(High)	500lm(Turbo)	100lm(Top)
CRI	70			
Color temperature	5500-7500K			
Battery	3.7V 350mAh			
Charging indicator	Red - Green			
Switch function	SMD - Low - High - Red - OFF			
Operating time	5h(SMD) - 5h(Low) - 1.5h(High) - OFF 30S(Turbo)			
Charging time	3h			
Charging Port	USB-C			
IP/ IK rating	IPX2 / IK07			
Dimension(mm)	111x24x25			
Weight(g)	43			

Item No.	6695-A			
Light source	COB + SMD			
Lumen	100lm(Low)	250lm(High)	500lm(Turbo)	100lm(Top)
CRI	70			
Color temperature	5500-7500K			
Battery	3.7V 350mAh			
Charging indicator	Red - Green			
Switch function	SMD - Low - High - Red - OFF			
Operating time	5h(SMD) - 5h(Low) - 1.5h(High) - OFF 30S(Turbo)			
Charging time	3h			
Charging Port	USB-C			
IP/ IK rating	IPX2 / IK07			
Dimension(mm)	111x24x25			
Weight(g)	43			

Item No.	6618		
Light source	COB + SMD		
Lumen	100lm(Top)	40lm(Low)	150lm(High)
CRI	-		
Color temperature	-		
Battery	2 x AAA		
Charging indicator	-		
Switch function	SMD - Low - High - OFF		
Operating time	5h(Top) - 8h(Low) - 0.5h(High)		
Charging time	-		
Charging Port	-		
IP/ IK rating	IPX0 / IK07		
Dimension(mm)	15.5x15.5x166		
Weight(g)	79		



Item No.	7736	
Light source	CREE XPG	
Lumen	150lm	30lm
CRI	-	
Color temperature	-	
Battery	2 x AAA	
Charging indicator	-	
Switch function	High - Low - OFF	
Operating time	2h(High) - 6h(Low)	
Charging time	-	
Charging Port	-	
IP/ IK rating	IPX7 / IK07	
Dimension(mm)	14.5x14x138.5	
Weight(g)	51.2	

Item No.	7643-1	
Light source	Osram P8	
Lumen	130lm	40lm
CRI	65	
Color temperature	6500 - 7500K	
Battery	2 x AAA	
Charging indicator	-	
Switch function	High - Low - Strobe - OFF	
Operating time	5h(High) - 10h(Low)	
Charging time	-	
Charging Port	-	
IP/ IK rating	IPX4 / IK07	
Dimension(mm)	16x15.5x140.5	
Weight(g)	28	



SUPER BRIGHT FLASHLIGHT

 **8000** Lumens

 **7.4v 5000mAh**




Item No.	7737	
Light source	COB	
Lumen	1000lm	8000lm
CRI	70	
Color temperature	6000 - 7000K	
Battery	7.4V 5000mAh	
Charging indicator	Red - Green	
Switch function	Low - High - OFF	
Operating time	3h(Low) - 1.5h(High)	
Charging time	9h	
Charging Port	Micro USB	
IP/ IK rating	IPX4 / IK07	
Dimension(mm)	Ø64xØ32.5x276	
Weight(g)	700	




SUPER BRIGHT FLASHLIGHT

 **12000** Lumens(Turbo)

 **7.4v 5000mAh**

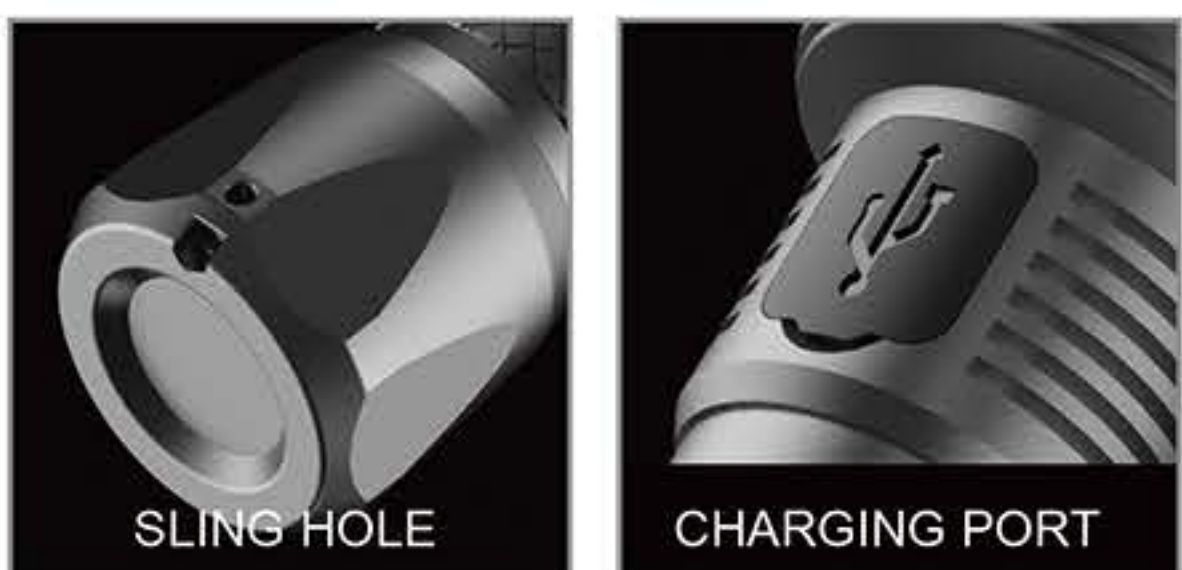

2 x ZOOM
Twist to adjust light beam from flood light to spot light.

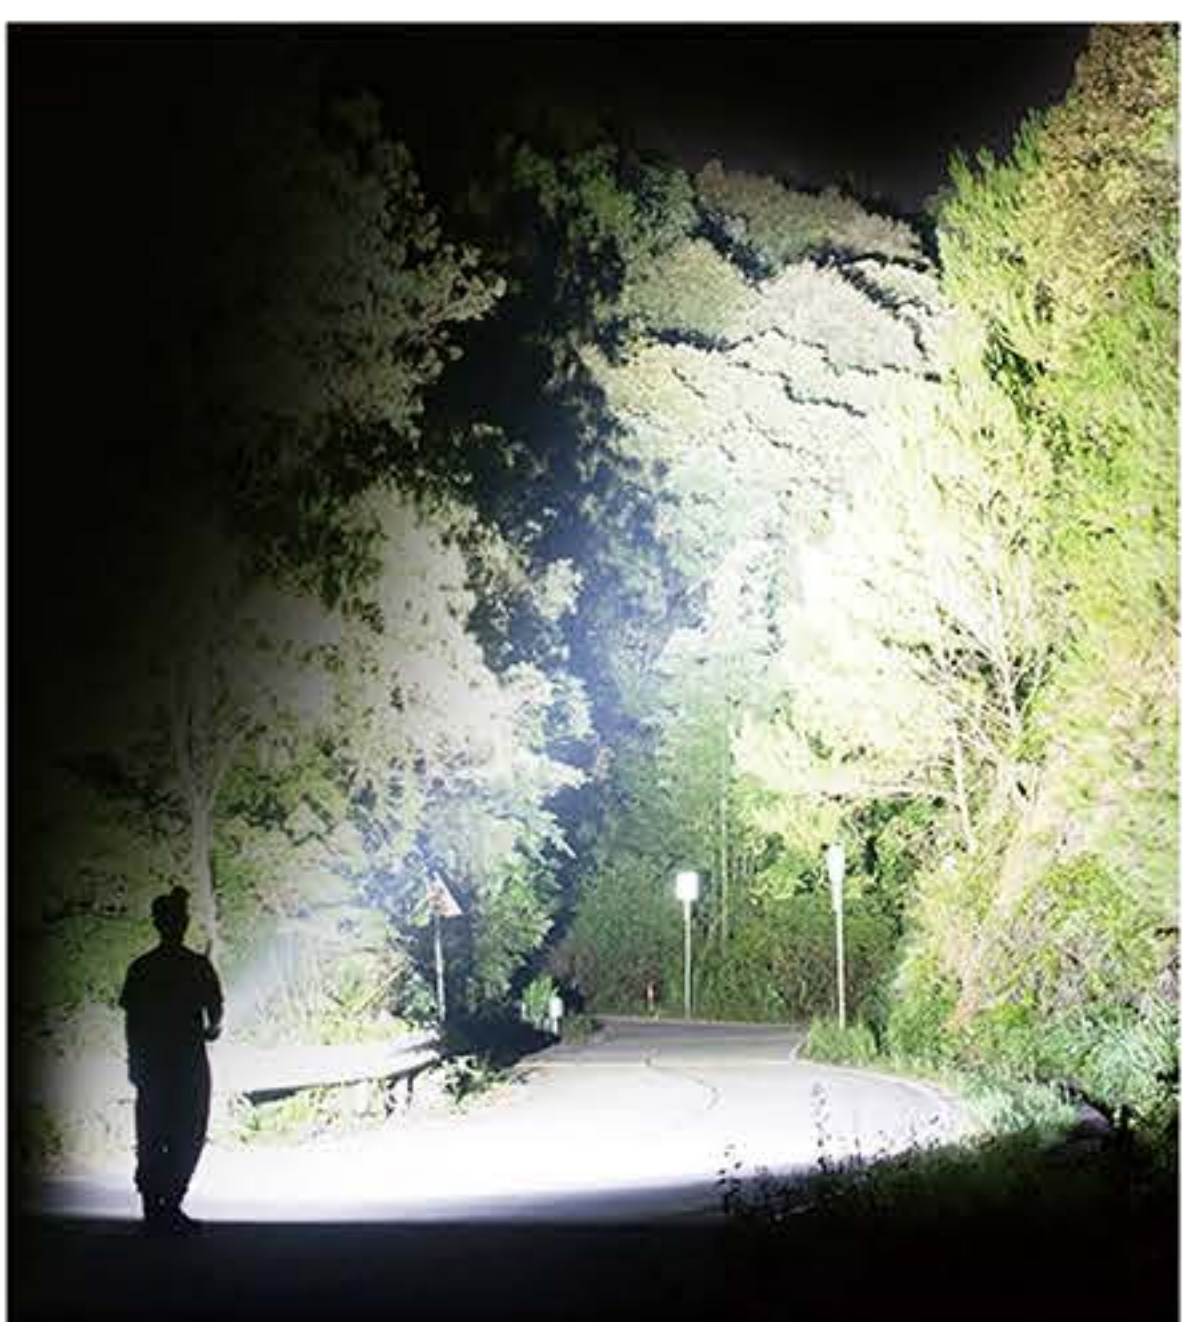

Item No.	7799			
Light source	COB			
Lumen	12000lm	7000lm	3000lm	300lm
CRI	70			
Color temperature	6000 - 7000K			
Battery	7.4V 5000mAh			
Charging indicator	Red - Green			
Switch function	High - Mid - Low -OFF			
Operating time	30S(Turbo) - 2h(High) - 3h(Mid) - 12h(Low)			
Charging time	6h			
Charging Port	USB-C			
IP/ IK rating	IPX7 / IK07			
Dimension(mm)	Ø67.8xØ42x295.2			
Weight(g)	905.5			


REMOTE FOCUS SYSTEM FLASHLIGHT

 **3000**
Lumens(Turbo)

 **3.7v 4000mAh**



6 x ZOOM
Twist to adjust light beam
from flood light, to spot light.

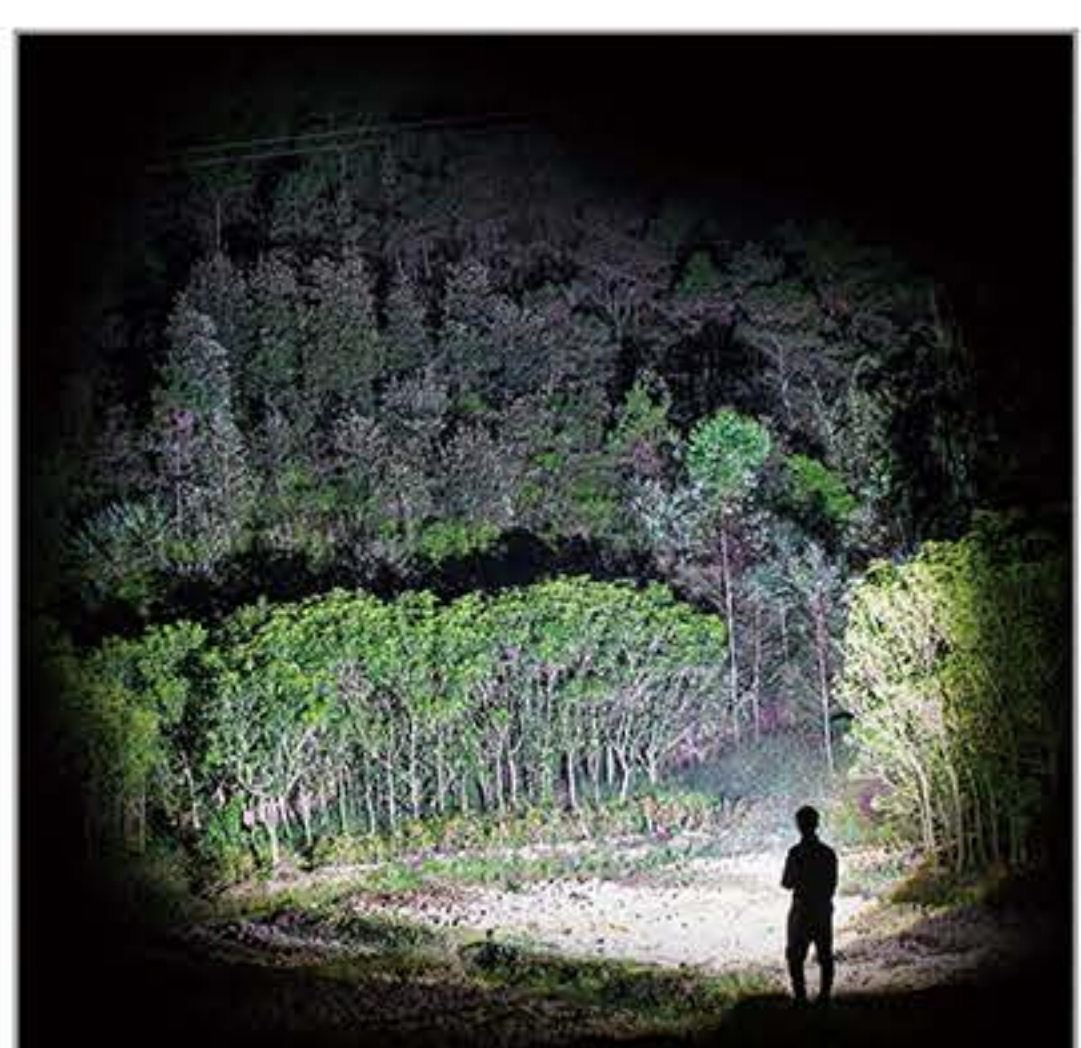

Item No.	7797			
Light source	COB			
Lumen	3000lm	1800lm	800lm	80lm
CRI	70			
Color temperature	6000 - 7000K			
Battery	3.7V 4000mAh			
Charging indicator	Red - Green			
Switch function	High - Mid - Low -OFF			
Operating time	30S(Turbo) - 2h(High) - 4h(Mid) - 20h(Low)			
Charging time	3h			
Charging Port	USB-C			
IP/ IK rating	IPX7 / IK07			
Dimension(mm)	Ø 45.6xØ33.5x187			
Weight(g)	325.5			



Item No.	7801	7802	7803
Light source	COB	COB	COB
Lumen	5000lm(Turbo)-3000lm(High)-1500lm(Mid)-500lm(Low)	10000lm(Turbo)-5000lm(High)-3000lm(Mid)-700lm(Low)	20000lm(Turbo)-8000lm(High)-5000lm(Mid)-500lm(Low)
CRI	70	70	70
Color temperature	6000 - 7000K	6000 - 7000K	6000 - 7000K
Battery	3.7V 2600mAh	7.4V 2600mAh	11.1V 2600mAh
Charging indicator	Red - Green	Red - Green	Red - Green
Switch function	High - Mid - Low - OFF	High - Mid - Low - OFF	High - Mid - Low - OFF
Operating time	30S(Turbo) - 1.5h(High) - 2h(Mid) - 4h(Low)	30S(Turbo) - 1.5h(High) - 2h(Mid) - 4h(Low)	30S(Turbo) - 1h(High) - 2h(Mid) - 8h(Low)
Charging time	5h	5h	6h
Charging Port	USB-C	USB-C	USB-C
IP/ IK rating	IPX7 / IK07	IPX7 / IK07	IPX7 / IK07
Dimension(mm)	Ø49xØ32.5x177	Ø 55.6xØ33x242.5	Ø 72.5xØ56x177
Weight(g)	313	450	830



Item No.	7804	7801-A	7802-A
Light source	SMD	SMD	SMD
Lumen	1000lm(Turbo)-650lm(High)-350lm(Mid)-100lm(Low)	1000lm(Turbo)-600lm(High)-300lm(Mid)-100lm(Low)	1000lm(Turbo)-600lm(High)-300lm(Mid)-100lm(Low)
CRI	60	70	70
Color temperature	5000 - 6500K	6000 - 7000K	6000 - 7000K
Battery	3.7V 8000mAh	3.7V 2600mAh	3.7V 5200mAh
Charging indicator	Red - Green	Red - Green	Red - Green
Switch function	High - Mid - Low - OFF	High - Mid - Low - OFF	High - Mid - Low - OFF
Operating time	30S(Turbo) - 2.5h(High) - 7h(Mid) - 24h(Low)	30S(Turbo) - 1.5h(High) - 3h(Mid) - 8h(Low)	30S(Turbo) - 2h(High) - 4h(Mid) - 12h(Low)
Charging time	6h	5h	6h
Charging Port	USB-C	USB-C	USB-C
IP/ IK rating	IPX7 / IK07	IPX7 / IK07	IPX7 / IK07
Dimension(mm)	Ø67.8xØ42x295.2	Ø 55xØ32.5x184	Ø 55xØ33x245
Weight(g)	246.5	324	407

LASER LED FLASHLIGHT



250
Lumens



3.7v 4000mAh

Switch / Indicator



CHARGING PORT

Item No.	7784
Light source	Laser
Lumen	250lm
CRI	60
Color temperature	6000 - 7000K
Battery	3.7V 4000mAh
Charging indicator	Red - Green
Switch function	ON - OFF
Operating time	2.5h
Charging time	4h
Charging Port	USB-C
IP/ IK rating	IPX4 / IK07
Dimension(mm)	45.7x36x187.1
Weight(g)	310

**REMOTE
LIGHTING
1200m**



SLING HOLE

ALUMINUM ALLOY MATERIAL FLASHLIGHT



500
Lumens



3.7v 4000mAh

Switch / Indicator

Item No.	7785		
Light source	Samsung		
Lumen	500lm	250lm	125lm
CRI	70		
Color temperature	6000 - 7000K		
Battery	3.7V 4000mAh		
Charging indicator	Red - Green		
Switch function	High - Mid - Low - OFF		
Operating time	3.5h(High) - 7h(Mid) - 14h(Low)		
Charging time	4h		
Charging Port	USB-C		
IP/ IK rating	IPX7 / IK07		
Dimension(mm)	59x36x200		
Weight(g)	342		



**REMOTE
LIGHTING
357m**



SLING HOLE



CHARGING PORT



Switch / Indicator

**REMOTE
LIGHTING
357m**

SLING HOLE

CHARGING PORT



800
Lumens



3.7v 4000mAh

Item No.	7786		
Light source	Samsung		
Lumen	800lm	400lm	160lm
CRI	70		
Color temperature	6000 - 7000		
Battery	3.7V 4000mAh		
Charging indicator	Red - Green		
Switch function	Low - Mid - High - OFF		
Operating time	9.5h(Low) - 6h(Mid) - 5.5h (High)		
Charging time	5h		
Charging Port	USB-C		
IP/ IK rating	IPX7 / IK07		
Dimension(mm)	59x59x200		
Weight(g)	342		

3 x ZOOM

Simply zoom-in & zoom-out the light to achieve different beams.

WIRELESS RECHARGE



Item No.	7670	7732
Light source	CREE XML U3	Osram P8
Lumen	750lm(High) - 300lm(Mid) - 150lm(Low)	600lm(High) - 280lm(Mid) - 60lm(Low)
CRI	-	-
Color temperature	-	-
Battery	3.7V 4000mAh	3.7V 2600mAh
Charging indicator	Red - Green	Red - Green
Switch function	High - Mid - Low - Strobe - SOS - OFF	High - Mid - Low - OFF
Operating time	3h(High) - 6h(Mid) - 12h(Low)	1.5h(High) - 3.5h(Mid) - 15h(Low)
Charging time	5h / 12h(Wireless)	4h
Charging Port	Micro USB	USB - C / Magnetic Charging
IP/ IK rating	IPX4 / IK07	IPX3 / IK07
Dimension(mm)	42x32x172 / 86.3x78.5x43.4(+Base)	31x31x135
Weight(g)	291	200



Item No.	7735	7739	7730
Light source	SMD	SMD	CREE XML T6
Lumen	1000lm(High) - 300lm(Low)	1000lm(High)-450lm(Mid)-80lm(Low)-6lm(Lowest)	750lm(High) - 350lm(Mid) - 200lm(Low)
CRI	70	70	-
Color temperature	5500 - 6500K	6000 - 7500K	-
Battery	3.7V 2600mAh	3.7V 2600mAh	3.7V 2200mAh
Charging indicator	Red - Green	Red - Green	Red - Green
Switch function	High - Low - OFF	High - Mid - Low - Lowest - OFF	High-OFF-Mid-OFF-Low-OFF-Strobe-OFF
Operating time	2h(High) - 4h(Low)	1h(High) - 3h(Mid) - 10h(Low) - 60h(Lowest)	3h(High) - 6h(Mid) - 9h(Low)
Charging time	3.5h	6h	4.5h
Charging Port	USB-C	USB-C	Micro USB
IP/ IK rating	IPX4 / IK07	IPX4 / IK07	IPX4 / IK07
Dimension(mm)	23x31x115	32x25x105	32x44x155
Weight(g)	127	122	239



Item No.	7688	7740	7459-3AAA
Light source	CREE XPG + Red LED + UV LED + COB	SMD	CREE XPG
Lumen	300lm(XPG) - 350lm(COB)	350lm(High) - 100lm(Low)	250lm(High) - 75lm(Low)
CRI	65	70	-
Color temperature	6000 - 7500K	5500 - 7000K	-
Battery	3.7V 2600mAh	3.7V 750mAh	3 x AAA
Charging indicator	Red - Green	Red - Green	-
Switch function	XPG-Red-UV-OFF/COB White-Red- Red Strobe-OFF	High - Low - OFF	High - Low - Strobe - OFF
Operating time	3h(XPG) - 2h(COB)	1h(High) - 4h(Low)	1.5h(High) - 4h(Low)
Charging time	4h	4h	-
Charging Port	Micro USB	Magnetic Charging	-
IP/ IK rating	IPX4 / IK07	IPX4 / IK07	IPX4 / IK07
Dimension(mm)	40x30.5x161.5	21x21x120	35x35x128
Weight(g)	292	186	101



Item No.	7459-3D	7685	7687
Light source	CREE XML T6	CREE XPG	CREE XPG
Lumen	500lm(High) - 120lm(Low)	180lm(High) - 50lm(Low)	250lm(High) - 35lm(Low)
CRI	-	-	65
Color temperature	-	-	6000 - 7500K
Battery	3 x D	2 x AA	3 x AAA
Charging indicator	-	-	-
Switch function	High - Low - Strobe - OFF	High - Low - Strobe - OFF	High - Low - Strobe - OFF
Operating time	5h(High) - 12h(Low)	1.5h(High) - 3h(Low)	2.5h(High) - 15h(Low)
Charging time	-	-	-
Charging Port	-	-	-
IP/ IK rating	IPX4 / IK07	IPX4 / IK07	IPX4 / IK07
Dimension(mm)	56.5x56.5x318	20x28x161.5	36x29x123.4
Weight(g)	422	108	109.5

RETRO OUTDOOR
CAMPING LAMP

6693

COB
LUMENS
90

TOP LED
LUMENS
200



Battery: 3 x AAA
Brightness: LED 30-250Lm COB 10-100Lm
Endurance: LED - 1.5Hrs COB - 3Hrs


Illuminant	COB+LED
Switch Mode	COB Low-High-Off LED Low-High-Off
Dimension(mm)	Ø97 X 133
Weight(g)	255



Use LED filament warm light color temperature, more atmosphere.



Use multiple LED beads at the top, warm white light illumination, more bright.

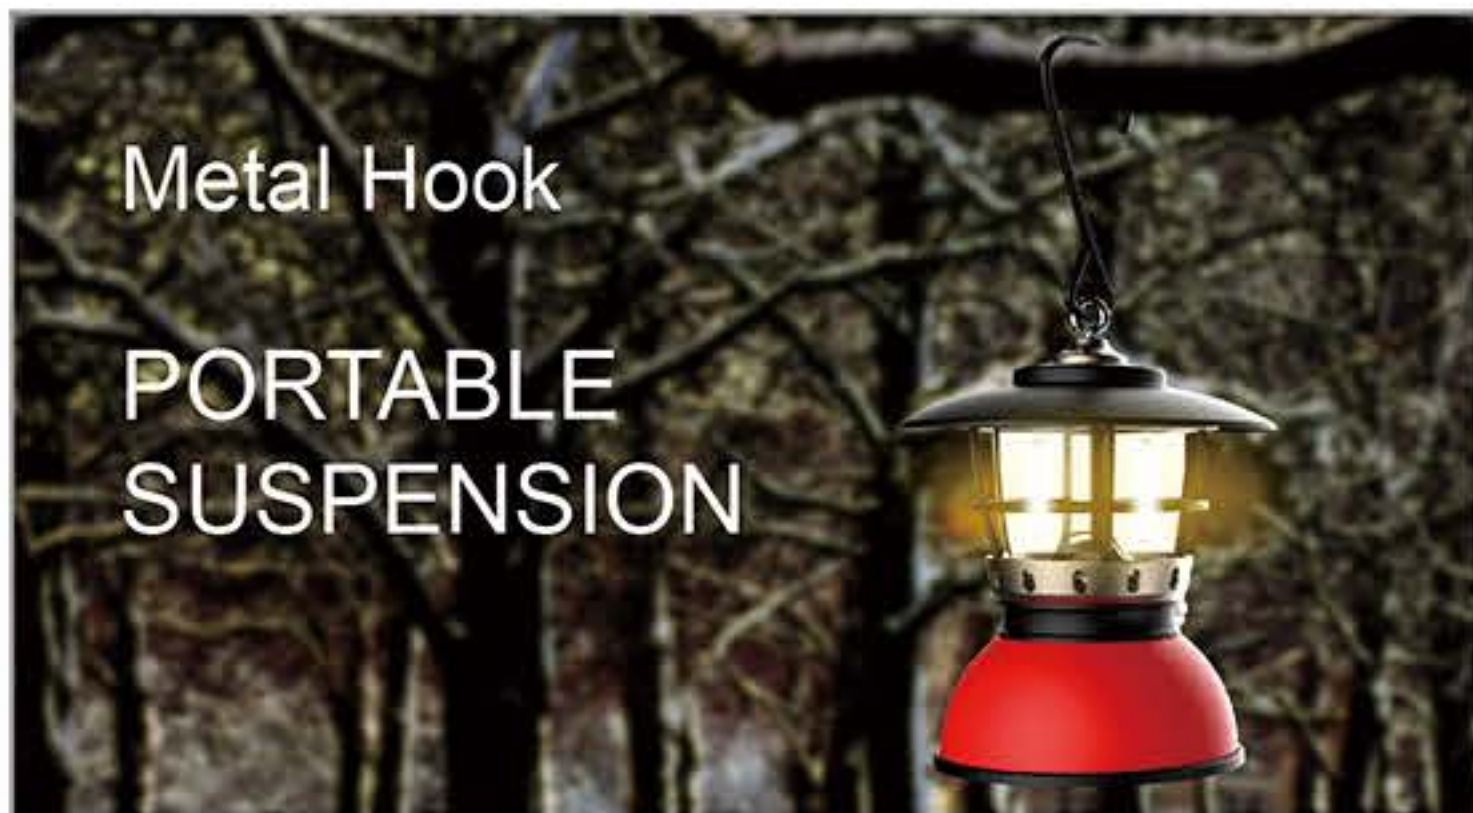

Metal Hook

PORTABLE
SUSPENSION



Battery Compartment



Stepless Dimming



Portable Suspension



Water Proof

RETRO OUTDOOR
CAMPING LAMP

6686

COB
LUMENS
200

TOP LED
LUMENS
500



Rotate to adjust light and brightness

Battery: 3.7V 4000mAh
Brightness: COB 10-200Lm LED 25-500Lm
Run Time: COB 65-3.5Hrs LED 35-2Hrs
Charger: 5V1A (Type-C)

Illuminant	COB+LED
Switch Mode	COB Low-High-Off LED Low-High-Off
Charging Time	3.5hrs
Dimension(mm)	Ø145.5 X 236.5
Weight(g)	910



Use LED filament warm light color temperature, more atmosphere.



Use multiple LED beads at the top, warm white light illumination, more bright.



Stepless Dimming



Portable Suspension



Type-C Charging



Power Bank



Water Proof



4000mAh Lithium Battery

MULTI-FUNCTION CAMPING LAMP



Light Selection

Rotate the silver accessories and select the appropriate light.



Can be Mounted

Item No.	6744
Light source	COB + SMD
Lumen	55lm(Low) - 170lm(High) (COB) 150lm(Low) - 500lm(High) (SMD) 80lm(Low) - 240lm(High) (SMD)
CRI	70
Color temperature	3000 - 3500K 6500 - 7500K
Battery	3.7V 2000mAh
Charging indicator	4 Power Indicators
Switch function	Low - High - Breathe - OFF(COB) Low - High - OFF(SMD)
Operating time	22h(Low) - 6h(High) / 9h(Low) - 2.5h(High) / 12h(Low) - 3.5h(High)
Charging time	3h
Charging Port	USB - C
IP/ IK rating	IPX4 / IK07
Dimension(mm)	53x53x134.5
Weight(g)	189.3



DUAL DISTANCE BEAM BIKELIGHT

Item No.	6647
Light source	SMD + COB
Lumen	180lm(Low) - 500lm(High) / 500lm(COB) / 800lm(Both)
CRI	65
Color temperature	5500 - 7500K
Battery	3.7V 2000mAh
Charging indicator	Red - Green
Switch function	Low - High - OFF (SMD) COB - Strobe - Red - Red Strobe - OFF (COB)
Operating time	5.5h(Low) - 2.5h(High) - 2.5h(COB) - 1h(Both)
Charging time	4h
Charging Port	USB - C
IP/ IK rating	IPX4 / IK07
Dimension(mm)	48x88x92
Weight(g)	109.5



Item No.	6653
Light source	SMD + COB
Lumen	150lm(Low) - 350lm(High) / 280lm(COB) / 400lm(Both)
CRI	80
Color temperature	5000 - 8000K
Battery	3 x AAA / 3.7V 1000mAh
Charging indicator	-
Switch function	Low - High - OFF (SMD) High-Strobe-Red-Red Strobe-OFF (COB)
Operating time	8h(Low) - 3.5h(High) - 2.5h(COB) - 1h(Both)
Charging time	-
Charging Port	-
IP/ IK rating	IPX4 / IK07
Dimension(mm)	43x30x88
Weight(g)	83